


 400-188-9898



— Valve/HVAC/Bathroom/Pipe —

ZHEJIANG RUIGE VALVE GROUP CO.,LTD.

CHINA SANITARY WARE BRAND
CHINESE FAMOUS BRAND

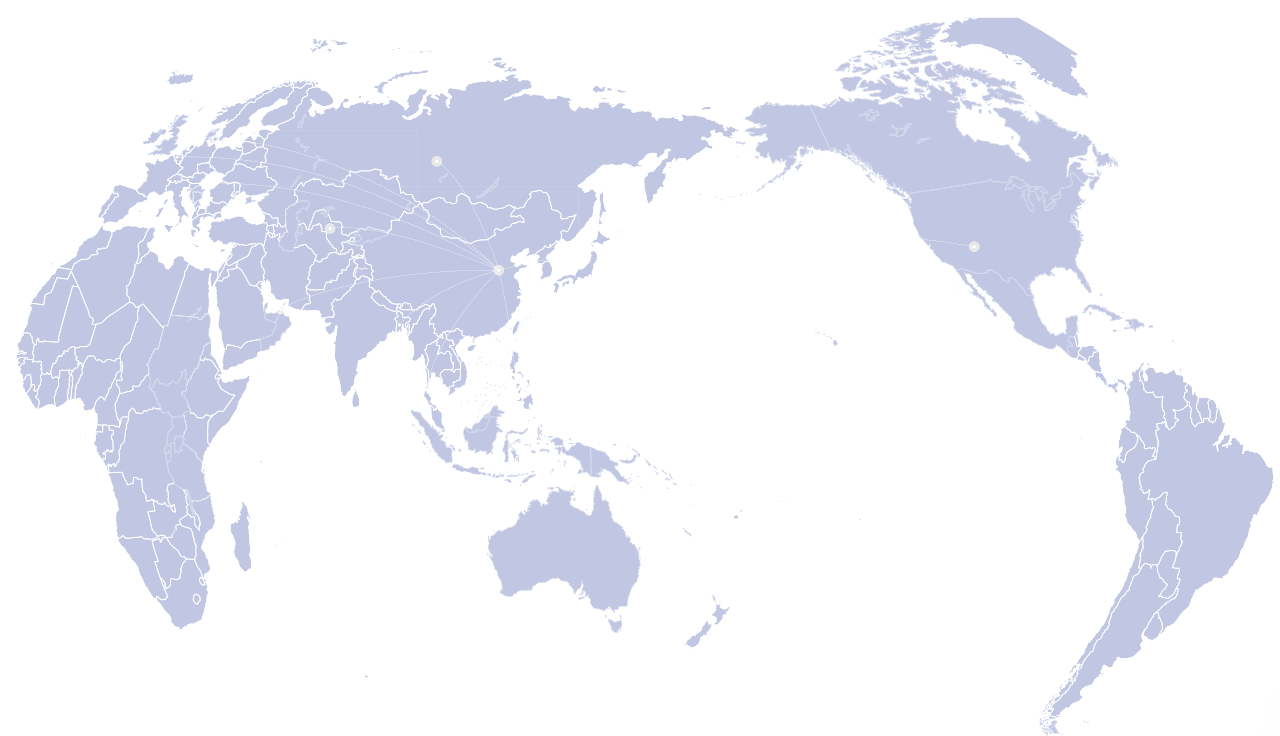

ZHEJIANG RUIGE VALVE GROUP CO.,LTD.



Puqing Industry Zone Damaiyu Town Yuhuan City Zhejiang Province China



+86-576-8751 5888 8738 2698



+86-576-8738 1688



www.chinaruige.com



mail@chinaruige.com



ABOUT RUIGE

30⁺
 More than 30 years of
 production experience

100⁺
 More than 100 professional and
 technical personnel

500⁺
 More than 500
 employees

50000⁺
 Construction area of more than
 50,000 square meters

Zhejiang Ruige Copper Co., Ltd. was founded in 1993, is located in the coast of the East China Sea, China's valve capital, water heating valve procurement base - Zhejiang Yuhuan. The company covers an area of more than 30,000 square meters, construction area of more than 50,000 square meters, the existing staff of more than 500 people, all kinds of professional and technical personnel more than 100 people. The company set R & D, production, sales and service as one, the products cover valves, plumbing, bathroom, pipe fittings, widely used in water supply and drainage system, urban heating system, HVAC pipe system, air conditioning pipe system, gas system and product support and other fields of joint-stock enterprises; For domestic and foreign users to provide the ultimate one-stop service, product sales network throughout foreign and domestic 32 provinces and autonomous regions, favored by users and praise, in the domestic medium and low pressure civilian copper valve field is one of the four major valve brands.

The company has domestic advanced forging production line, heating IGBT/D high frequency furnace, DT-8812H infrared thermometer, Taiwan precision special machine, precision CNC machine tools, ball valve special CNC machine tools, Taiwan gate valve special processing machine tools, fifteen assembly production lines, automatic pressure test table, polishing and ultrasonic cleaning machine and high performance annealing furnace and other automatic and semi-automatic Production and processing equipment. There are German imported spectrometer, bending resistance, torsion resistance, tensile test bench, hydrostatic pressure bursting test bench, high and low temperature airtight test bench, water valve life test bench, water valve flow test bench, gas valve flow test bench, gas valve life test bench, temperature control valve performance curve test bench, warm packet thermal durability test bench, valve core life testing machine, hose life testing machine, image measuring instrument, metallurgical testing unit Advanced testing equipment and testing technology such as water bath laboratory, and passed the National CNAS Accreditation Testing Center in 2018.

The company has passed ISO9001, ISO14001, TS pressure pipeline license, standardized good behavior certification, China Water Saving product certification, China City Gas Association member units and other system certifications. Won the "Zhejiang Province famous trademark", "Zhejiang famous brand products", China's construction hardware industry "well-known brand", China quality million miles quality credit enterprise, "national plumbing, valve brand designated production (procurement) enterprise", "AAA" level credit enterprise, Zhejiang Provincial Bureau of Industry and Commerce ", Yuhuan County 100 enterprises and Yulong enterprises and many other honors. In 2010, the company was invited to participate in the drafting and formulation of the valve standard, which was organized by the National Valve Standardization Committee and presided over by the Hefei General Machinery Research Institute and approved by the Ministry of Industry and Information Technology of the People's Republic of China. The company's products are provided by China Pacific Insurance Company product liability insurance.

All along, Ruige company to "the user's today is Ruige's tomorrow" as the concept, to quality first as the goal, to customer satisfaction as the guidance, to manufacture high-quality products as the starting point, and always follow the "quality for quantity, quality for efficiency, quality for reputation" policy, continuous pursuit, exploration, development, innovation. Continuous improvement of product quality and after-sales service. We warmly invite new and old customers to visit us. Walk hand in hand with us. Seek common development.

Enterprise environment and market analysis

With China's entry into the World Trade Organization and the integration of world trade, the market competition will become more and more fierce. Valves, pipe fittings, sanitary ware global procurement trend, in such an environment, how to obtain the sustainable development of enterprises, factory entrepreneurship to take the road of standardization, specialization, refinement, the formation of their own unique core products, walk from the unique brand route. We rely on the company's worldwide distribution network. Form a strategic integrated cooperative partnership.


Guiding ideology

People-oriented, integrity management, science and technology plant. Mankind has entered the information age. The 21st century is the century of knowledge economy, enterprises must give full play to the subjective initiative and innovation of people in the operation, and enhance the cohesion and development of enterprises.

ZHEJIANG RUIGE COPPER



Development history

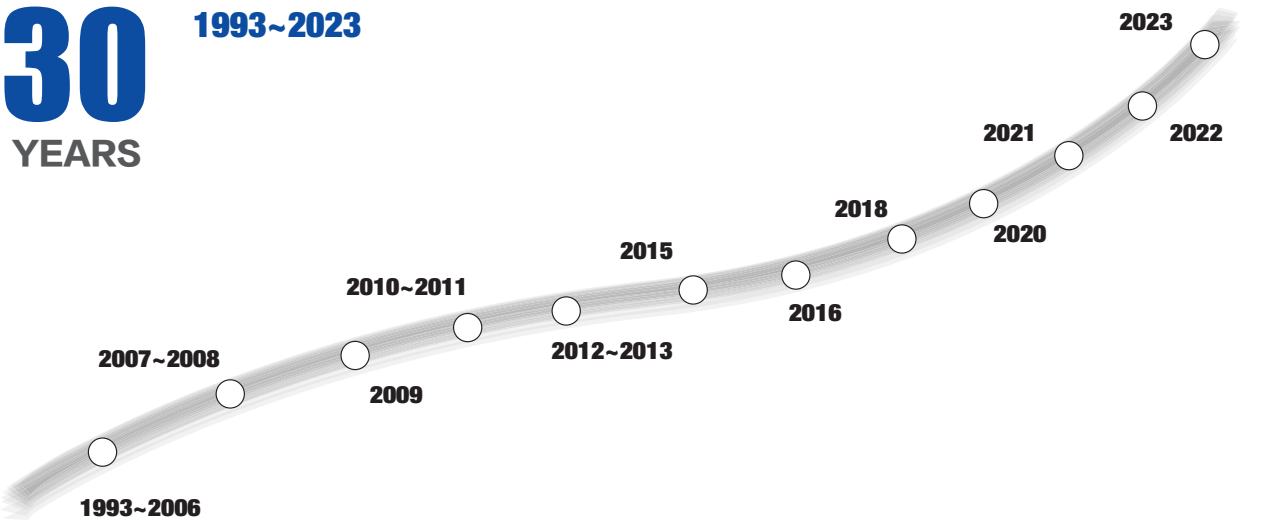

1993–2006	Founded in 1993, and the industry well-known brands, quality brands, production (procurement) designated enterprises
2007–2008	Iso 9001:2000 / ISO 4001:2004 / Standardized good behavior
2009	Zhejiang Famous brand/Zhejiang Famous Trademark/Special equipment manufacturing License
2010–2011	China Sanitary Brand/CE certification/Member of China Gas Association
2012–2013	National high-tech enterprise/Puqing Industrial Zone new factory built and put into use/Taizhou Patent demonstration Enterprise
2015	Provincial high-tech enterprises/Established Taizhou Yu high-tech Research and Development Center
2016	Provincial high-tech enterprise research and development center
2018	National CNAS Accreditation Testing Center/" Made in Zhejiang "certification/Municipal Government Quality Award
2020	Yulong Enterprise/Intellectual Property Management System certification/Member of China Water Association
2021	Zhejiang trademark brand strategy demonstration enterprise/Taizhou specialized special new "little giant" enterprise /AAA measurement management system certification
2022	Zhejiang Province specialized special new "little giant" enterprise/China water-saving certification
2023	National standard drafting unit

Quality concept

- Corporate vision: Committed to becoming a global plumbing industry leader.
- Enterprise mission: To provide global customers with the most perfect water heating system solutions.
- Enterprise core values: people-oriented, integrity management, quality first, science and technology plant.
- Enterprise spirit: unity, pragmatism, innovation
- Corporate philosophy: Integrity, service, innovation, beyond.
- Quality policy: quantity by quality, efficiency by quality, survival by quality, reputation by quality
- Quality commitment: Establish quality concept, strengthen quality awareness
- Description of the quality policy: We must establish a modern quality concept, strengthen quality awareness, make our quality work more comprehensive, in-depth and perfect, with excellent quality to win customers and the market.

Quality management system

- The company has established a quality management system in accordance with the requirements of ISO9001:2015 standard, and implements, maintains and continuously improves the quality management system. Based on the current scale, product and management needs, the company has studied and discussed the processes required for the quality management system and determined its application throughout the company, including the following:
- A. Determine the input and desired output of the processes required by the public quality management system, including the whole business process from identifying product and service requirements, communicating these requirements, issuing and controlling the requirements of externally provided processes and products, producing products and inspecting products;
- (b) Determine the sequence and interaction between these processes;
- c) Identify and apply the criteria and methods needed to ensure the effective operation and control of these processes through monitoring, measurement and related performance indicators;
- (d) Determine the resources required for these processes and ensure their availability;
- (e) Determine the responsibilities and authority for assigning these processes;
- f) Determine measures to address risks and opportunities in the management of these processes;
- g, through the implementation of management reviews, evaluate these processes and implement changes required to ensure that the intended results of these processes are achieved;
- h, improve these processes and the quality management system through the effective management of these processes.
- Top management must define quality objectives and measures at the relevant functions and levels of the organization, and the company's quality objectives and measures must be included in the business plan. Quality objectives must be achievable, measurable, and consistent with the quality policy.
- Quality objectives must include what is necessary to meet product requirements and fulfill customer expectations; At present, the company's quality target projects are:
- Product out of the company's batch pass rate reached 100%, assembly completed sampling inspection batch pass rate reached 99%.
- The passing rate of random inspection and batch after machining is 98%. The customer satisfaction survey is greater than 92%.
- The company has passed the GB/T19001-2016 (ISO9001:2015) quality management system certification, GB/T24001-2016 (ISO14001:2015) environmental management system certification, GB/T28001-2011(OHSAS18001:2007) occupational health and safety management Management system certification and effective introduction to all departments to improve the management level of all departments.

1

Research and development


We combine humanistic social responsibility and market needs, and constantly explore and create far-reaching new products, carrying the mission of saving water, saving energy, green, environmental protection and harmonious nature, guiding human water concept, so that human beings cherish every drop of water.



2

Select materials


Spectrum to ensure high-quality low lead selection, and high-tech low lead treatment, effectively prevent the re-pollution of water quality, to ensure healthy water.



3

Hot forging

Low pressure casting and hot forging technology make the surface of the product smooth, smooth and uniform.



4

Refined addition

The introduction of high-precision CNC machine tools and multi-station special machines, the product structure is reasonable, the size is precise, so that the product is watertight, to ensure that the quality of Ruige is always stable.



5

Fit out

The introduction of a number of automatic production lines has greatly improved the efficiency of assembly and ensured the adequate supply of agents and dealers.



6

Detection

The company has invested heavily in the construction of international first-class testing center, the product itself of tensile, torsion, bending, flow detection and component spool, life and other life and high and low temperature detection as one of the professional equipment, for the brand to take off as a guarantee.



Perfect process

RUIGE 瑞格



SOPHISTICATED EQUIPMENT

In order to meet domestic and international demands, we have implemented automated and standardized production process in our workshop by introducing world-class production line. Meanwhile, our insisting belief on the principle "Quality is the Life of the Enterprise", constant improvement of test methods, establishment of high-level supervision and inspection institution and advanced production technology and equipment make sure our quality steady and consistent.





PROCESS, FORGING & MACHINING

The advanced low pressure casting technology, mature forging technology, high precision CNC lathes and multi-station special purpose machine guarantee the reasonable structure and precise fitness of products, which ensures 100% water tightness and keeps.




ELABORATE PRODUCTION & TESTING

Special quality inspection institutions, professional testing center and advanced test equipments build a sound, scientific and modern quality control system for Ruige, ensure us to pass the international quality inspection and obtain the relevant international certifications and lay the foundation for Ruige's future development.



MIXTURE SYSTEM

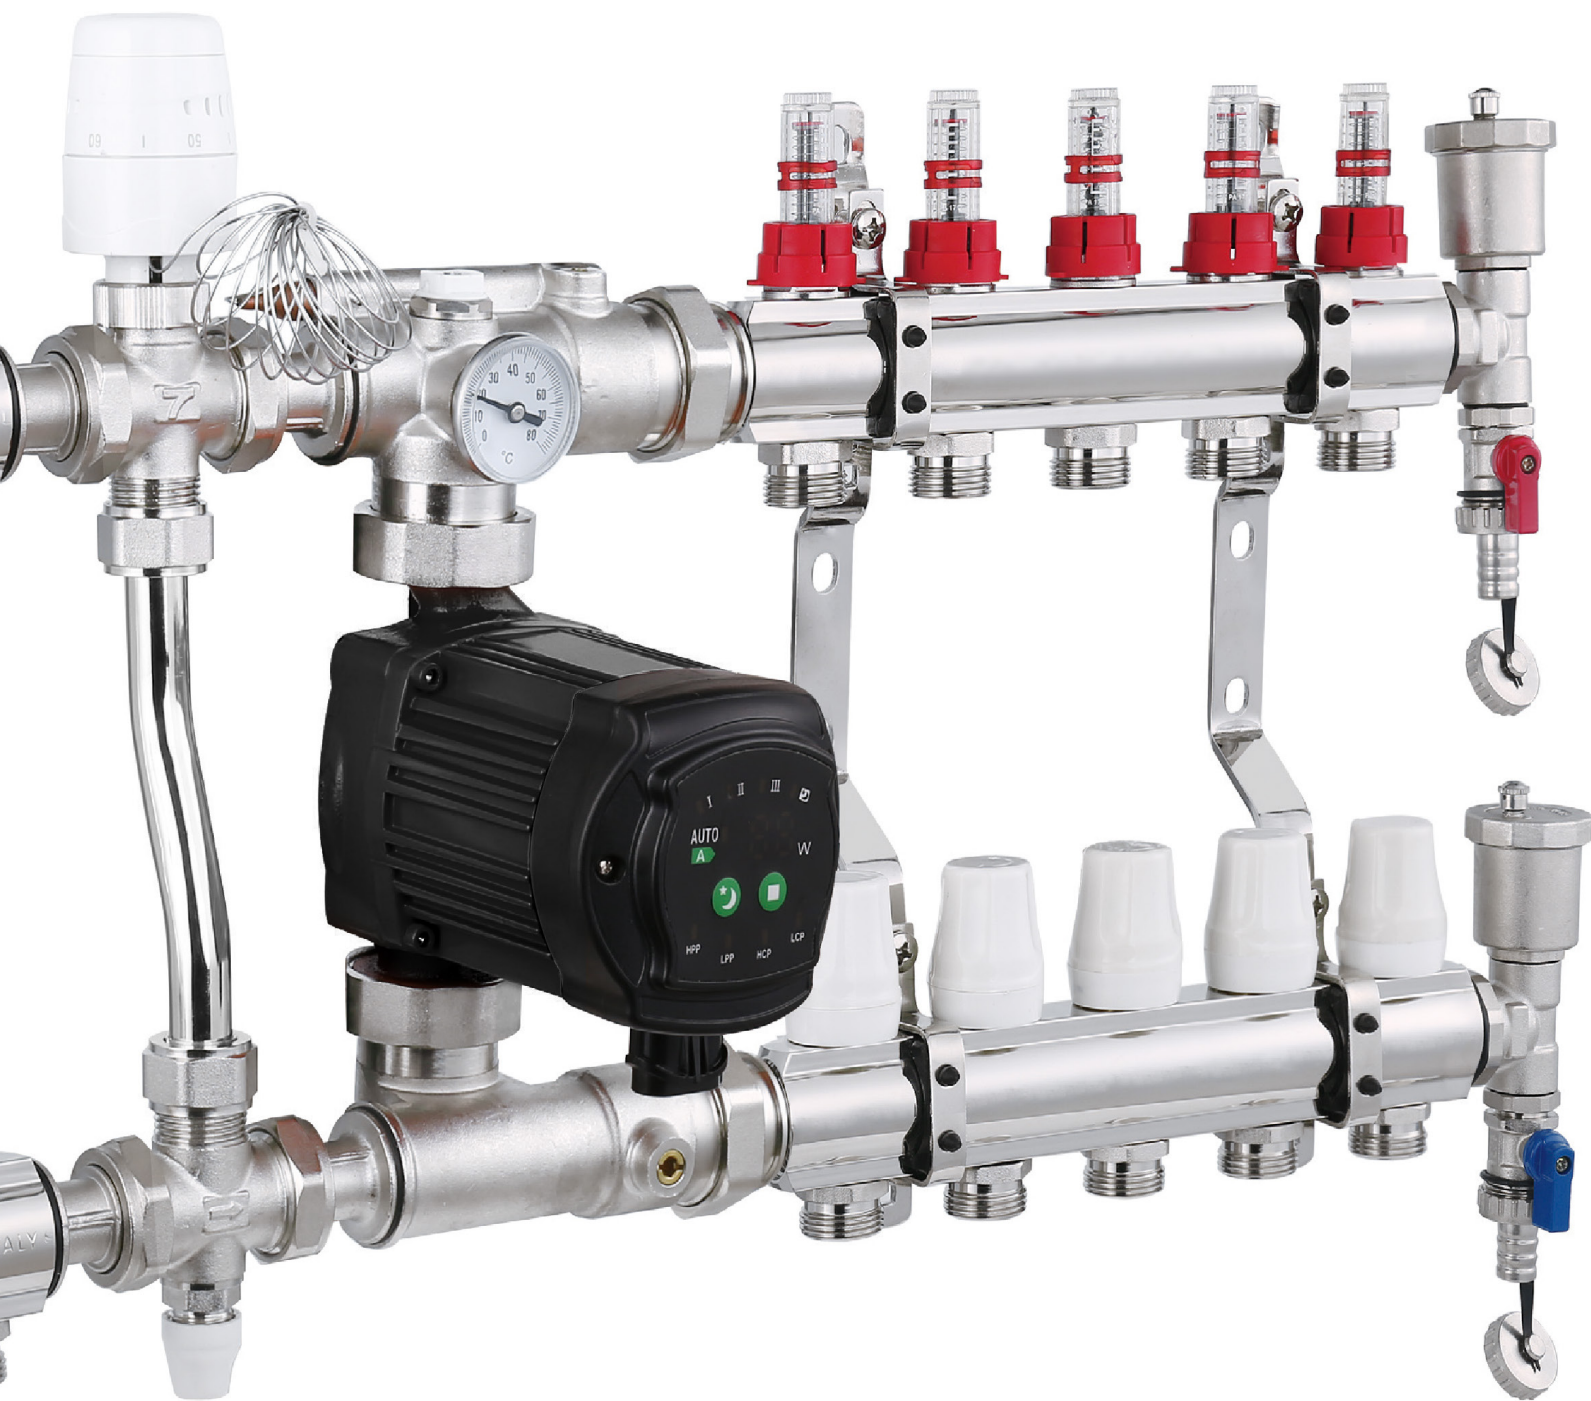

MIXTURE SYSTEM



5101
Mixture System

Technical Desc.

- Nominal pressure: ≤ 10bar
- Applicable medium: Cold and Hot water
- Working temperature: ≤ 100°C
- Temperature control range: 20~60°C
- Temperature control accuracy: ±1°C
- Pump connection thread: G 1 1/2"
- Connection thread: ISO 228 standard

Size

1"



5102
Mixture System

Technical Desc.

- Nominal pressure: ≤ 10bar
- Applicable medium: Cold and Hot water
- Working temperature: ≤ 100°C
- Temperature control range: 20~60°C
- Temperature control accuracy: ±1°C
- Pump connection thread: G 1 1/2"
- Connection thread: ISO 228 standard

Size

1"



5103
Mixture System

Technical Desc.

- Nominal pressure: ≤ 10bar
- Applicable medium: Cold and Hot water
- Working temperature: ≤ 100°C
- Temperature control range: 20~60°C
- Temperature control accuracy: ±1°C
- Pump connection thread: G 1 1/2"
- Connection thread: ISO 228 standard

Size

1"



5104
Mixture System

Technical Desc.

- Nominal pressure: ≤ 10bar
- Applicable medium: Cold and Hot water
- Working temperature: ≤ 100°C
- Temperature control range: 20~60°C
- Temperature control accuracy: ±1°C
- Pump connection thread: G 1 1/2"
- Connection thread: ISO 228 standard

Size

1"

MIXTURE SYSTEM



5105
Mixture System

Technical Desc.

- Nominal pressure: ≤ 10bar
- Applicable medium: Cold and Hot water
- Working temperature: ≤ 100°C
- Temperature control range: 20~60°C
- Temperature control accuracy: ±1°C
- Pump connection thread: G 1 1/2"
- Connection thread: ISO 228 standard

Size

1"

5106
Mixture System



Technical Desc.

- Nominal pressure: ≤ 10bar
- Applicable medium: Cold and Hot water
- Working temperature: ≤ 100°C
- Temperature control range: 20~60°C
- Temperature control accuracy: ±1°C
- Pump connection thread: G 1 1/2"
- Connection thread: ISO 228 standard

Size

1"

5107
Mixture System



Technical Desc.

- Nominal pressure: ≤ 10bar
- Applicable medium: Cold and Hot water
- Working temperature: ≤ 100°C
- Temperature control range: 20~60°C
- Temperature control accuracy: ±1°C
- Pump connection thread: G 1 1/2"
- Connection thread: ISO 228 standard

Size

1"

5108
Mixture System



Technical Desc.

- Nominal pressure: ≤ 10bar
- Applicable medium: Cold and Hot water
- Working temperature: ≤ 100°C
- Temperature control range: 20~60°C
- Temperature control accuracy: ±1°C
- Pump connection thread: G 1 1/2"
- Connection thread: ISO 228 standard

Size

1"

MIXTURE SYSTEM



5201
Pump Station


Technical Desc.

- Material: Brass
- Nominal pressure: ≤ 16bar
- Working temperature: ≤ 110
- Pump connection thread: Upper G1" , Lower G1 1/2"
- Nozzle spacing: 125mm
- Thermometer range: 0-120
- KV: 9.8 m³/h

Size

1"

5202
Pump Station

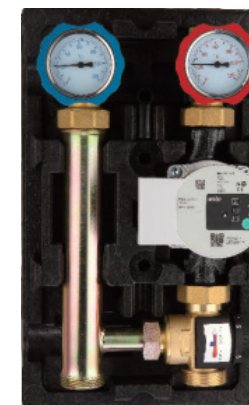


Technical Desc.

- Material: Brass
- Nominal pressure: ≤ 16bar
- Working temperature: ≤ 110
- Pump connection thread: Upper G1" , Lower G1 1/2"
- Nozzle spacing: 125mm
- Thermometer range: 0-120
- KV: 6.6 m³/h

Size

1"

5203
Pump Station

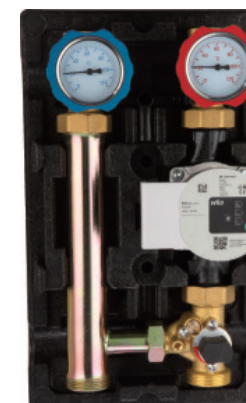

Technical Desc.

- Material: Brass
- Nominal pressure: ≤ 16bar
- Working temperature: ≤ 110
- Pump connection thread: Upper G1" , Lower G1 1/2"
- Nozzle spacing: 125mm
- Thermometer range: 0-120
- KV: 6.6 m³/h

Size

1"

5204
Seperator



Technical Desc.

- Nominal pressure: ≤ 10bar
- Applicable medium: Cold and Hot water
- Working temperature: ≤ 100°C
- Temperature control range: 20~60°C
- Temperature control accuracy: ±1°C
- Pump connection thread: G 1 1/2"
- Connection thread: ISO 228 standard

Size

1"

MIXTURE SYSTEM



5301
Mixture System

- Technical Desc.
- Nominal pressure:≤ 10bar
 - Applicable medium: Cold and Hot water
 - Working temperature: ≤100°C
 - Connection thread:ISO 228 standard

Size

1"



5302
Mixture System

- Technical Desc.
- Nominal pressure:≤ 10bar
 - Applicable medium: Cold and Hot water
 - Working temperature: ≤100°C
 - Connection thread:ISO 228 standard

Size

1"



5303
Mixture System

- Technical Desc.
- Nominal pressure:≤ 10bar
 - Applicable medium: Cold and Hot water
 - Working temperature: ≤100°C
 - Connection thread:ISO 228 standard

Size

1"



5304
Mixture System

- Technical Desc.
- Nominal pressure:≤ 10bar
 - Applicable medium: Cold and Hot water
 - Working temperature: ≤100°C
 - Connection thread:ISO 228 standard

Size

1"

MIXTURE SYSTEM



5305
Concealed Temperature Control Valve

- Technical Desc.
- Nominal pressure:≤ 10bar
 - Applicable medium: Cold and Hot water
 - Working temperature: ≤100°C
 - Temperature Range:10~50°C
 - IndoorTemperature control range:6~28°C
 - Temperature control accuracy: ±1°C
 - Connection thread:ISO 228 standard

Size

1"



5306
Concealed Temperature Control Valve

- Technical Desc.
- Nominal pressure:≤ 10bar
 - Applicable medium: Cold and Hot water
 - Working temperature: ≤100°C
 - Temperature Range:10~50°C
 - IndoorTemperature control range:6~28°C
 - Temperature control accuracy: ±1°C
 - Connection thread:ISO 228 standard

Size

1"



5307
Concealed Temperature Control Valve

- Technical Desc.
- Nominal pressure:≤ 10bar
 - Applicable medium: Cold and Hot water
 - Working temperature: ≤100°C
 - Temperature control range:6~28°C
 - Temperature control accuracy: ±1°C
 - Connection thread:ISO 228 standard

Size

1"



5308/5309
Mixture System

- Technical Desc.
- Applicable medium: Cold and Hot water
 - Working temperature: ≤100°C
 - Temperature control range:20~50°C,35-60°C,30-70°C
 - Temperature control accuracy: ±2°C
 - Connection thread:ISO 228 standard


5308

1"


5309

3/4"

1"

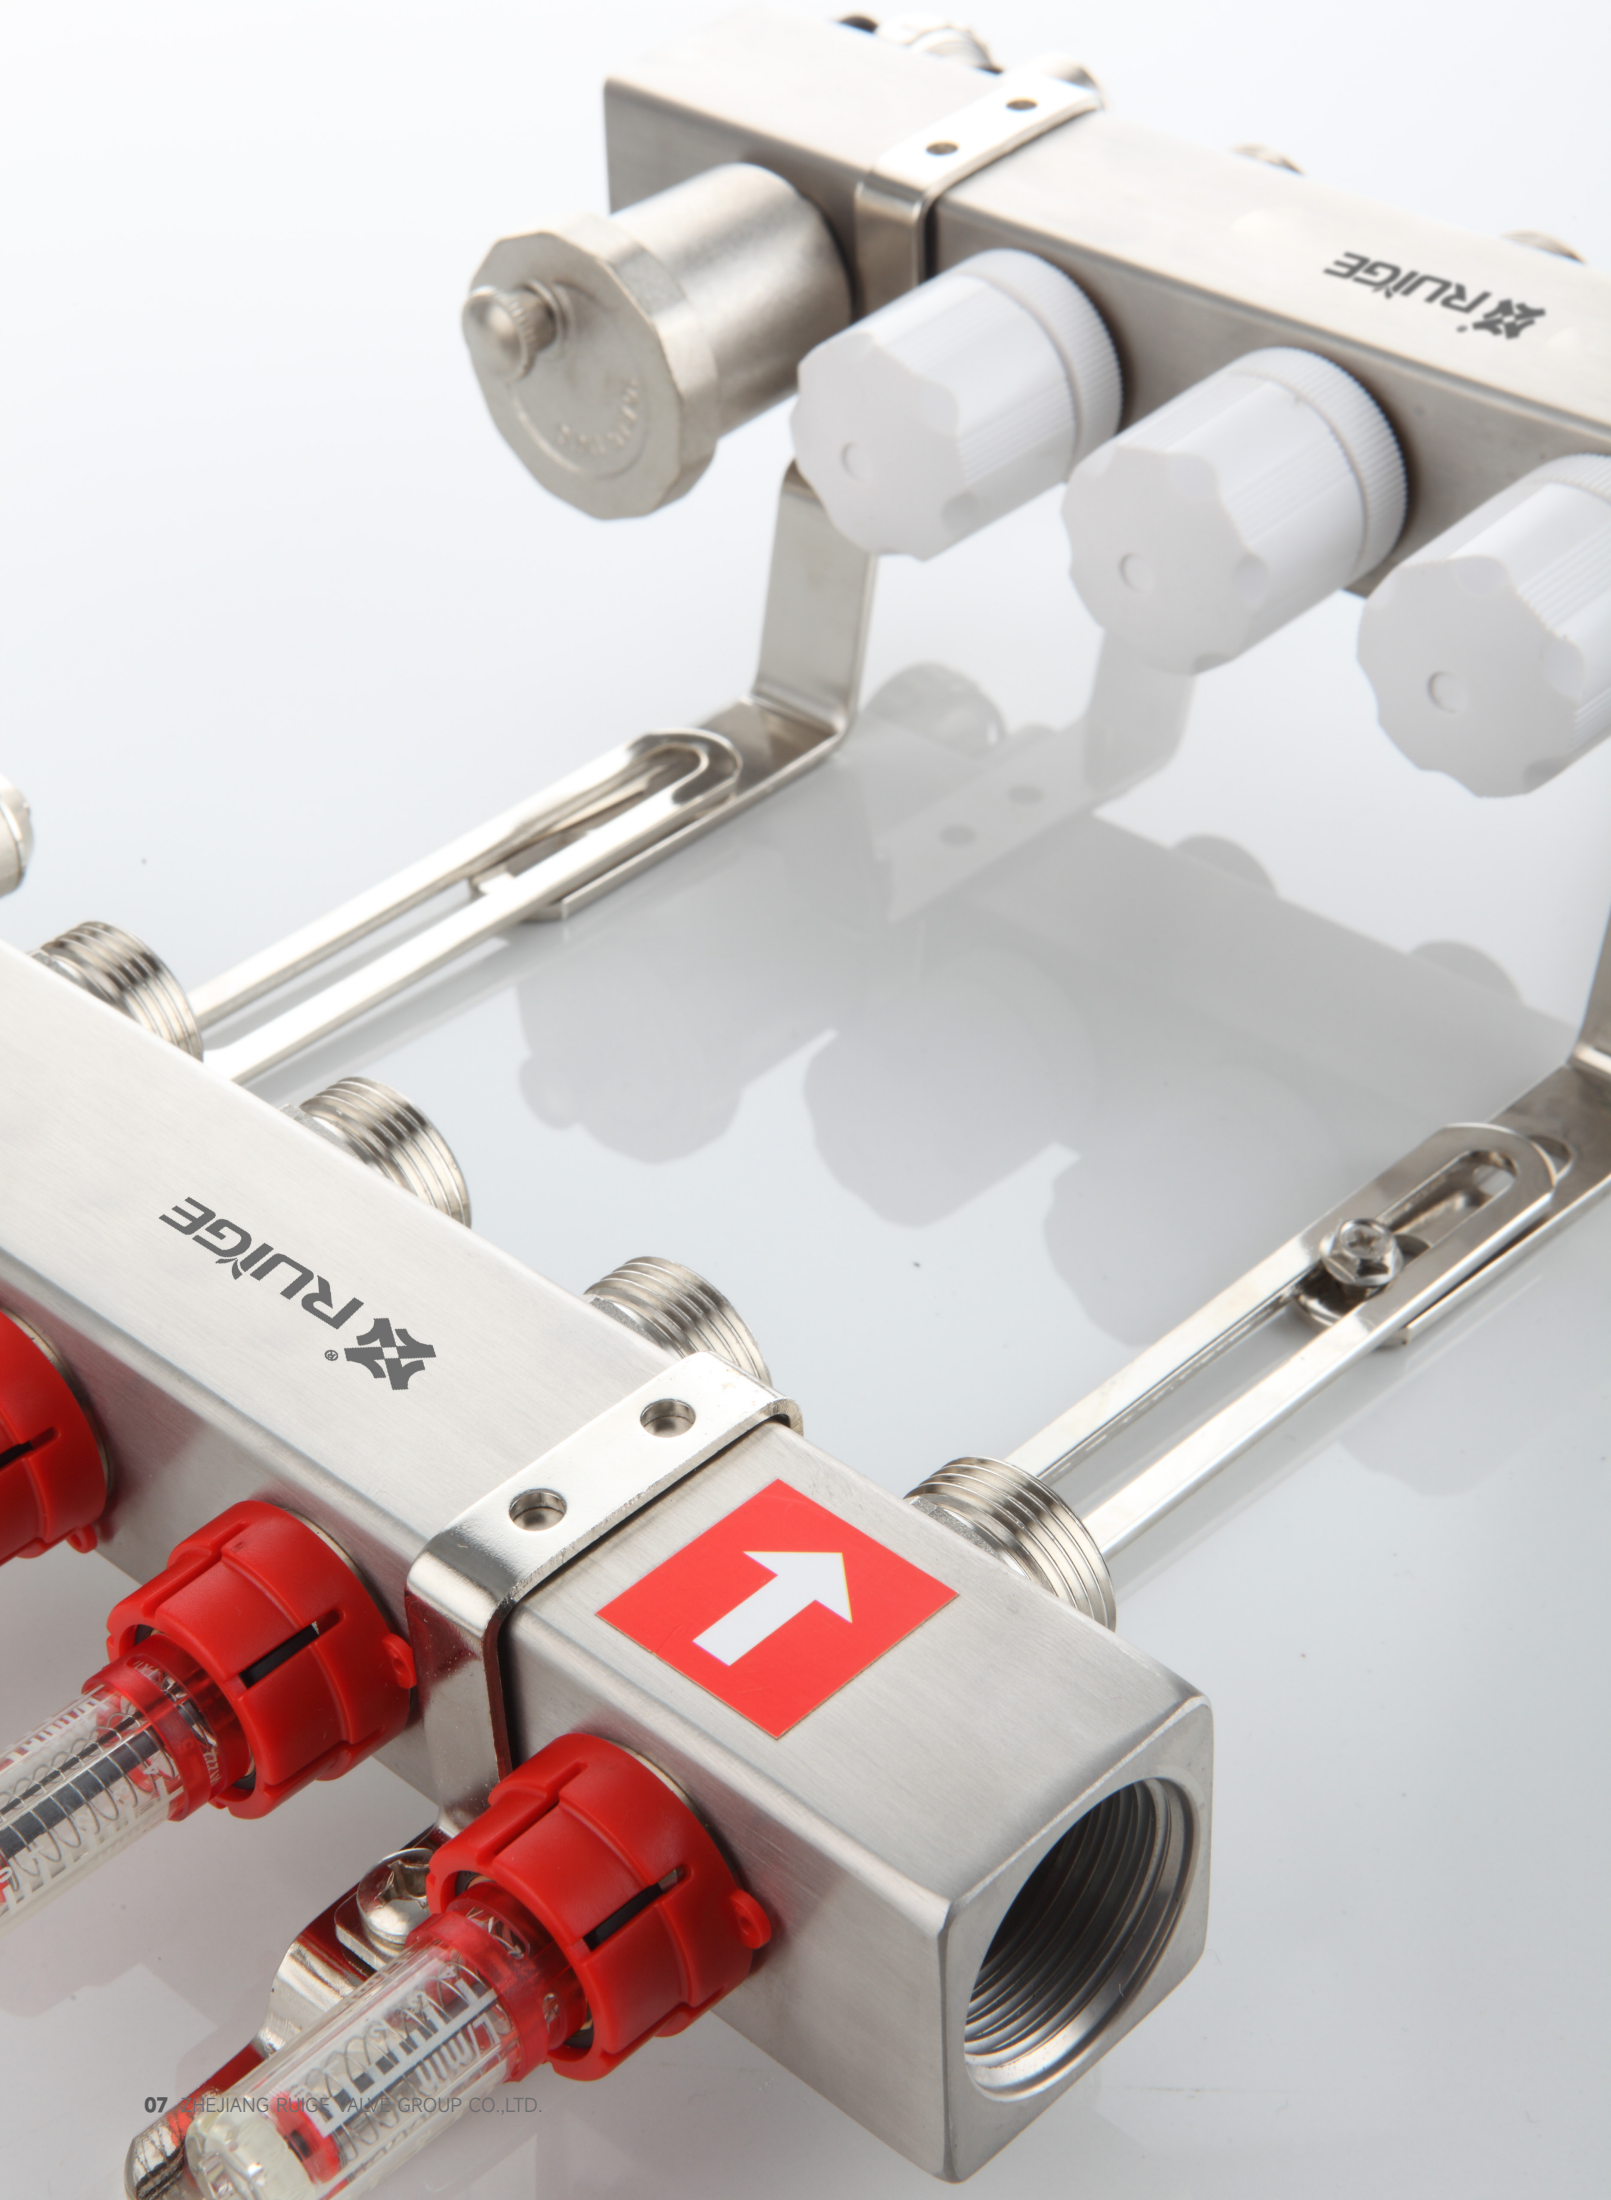


MANIFOLD SERIES

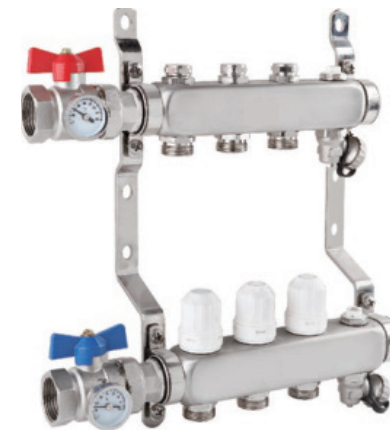

5401
Manifold

Technical Desc.


- 2~12ways
- Stainless steel 304 main body
- Cartridge:EPDM Sealing
- Max.work Pressure:10bar
- Working medium: water
- Working temperature:0°C ~110°C
- Thread standard:ISO 228

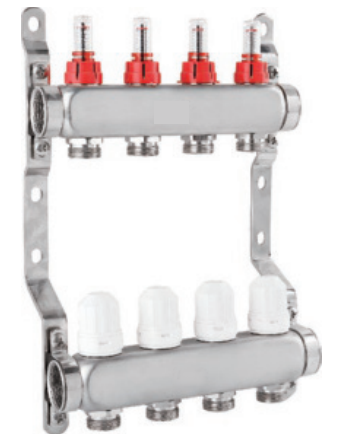

5402
Manifold

Technical Desc.


- 2~12ways
- Stainless steel 304 main body
- Cartridge:EPDM Sealing
- Max.work Pressure:10bar
- Working medium: water
- Working temperature:0°C ~110°C
- Thread standard:ISO 228

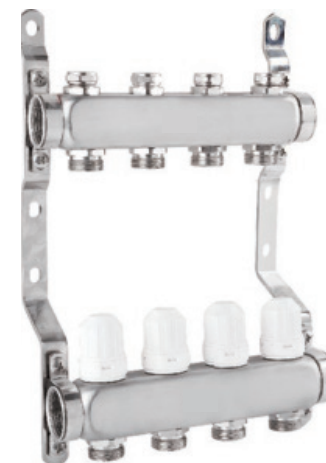

5403
Manifold

Technical Desc.

- 2~12ways
- Stainless steel 304 main body
- Cartridge:EPDM Sealing
- Max.work Pressure:10bar
- Working medium: water
- Working temperature:0°C ~110°C
- Thread standard:ISO 228

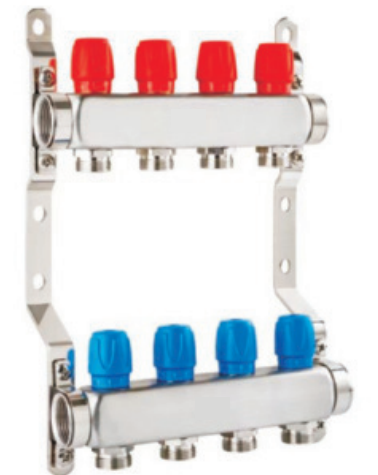


5404
Manifold

Technical Desc.

- 2~12ways
- Stainless steel 304 main body
- Cartridge:EPDM Sealing
- Max.work Pressure:10bar
- Working medium: water
- Working temperature:0°C ~110°C
- Thread standard:ISO 228


MANIFOLD SERIES

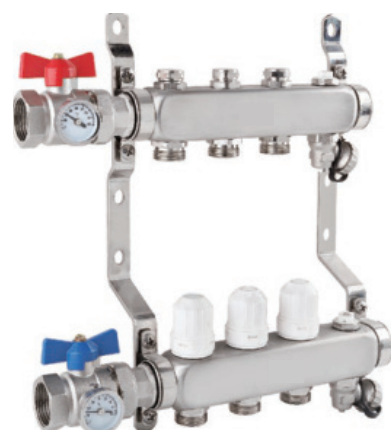

5405
Manifold

Technical Desc.

- 2~12ways
- Stainless steel 304 main body
- Cartridge:EPDM Sealing
- Max.work Pressure:10bar
- Working medium: water
- Working temperature:0°C ~110°C
- Thread standard:ISO 228

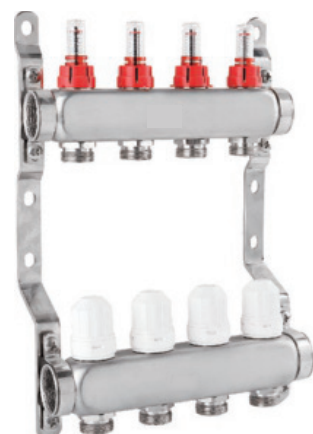

5406
Manifold

Technical Desc.

- 2~12ways
- Stainless steel 304 main body
- Cartridge:EPDM Sealing
- Max.work Pressure:10bar
- Working medium: water
- Working temperature:0°C ~110°C
- Thread standard:ISO 228

MANIFOLD SERIES



5409
Manifold

Technical Desc.


- 2~12ways
- Stainless steel 304 main body
- Cartridge:EPDM Sealing
- Max.work Pressure:10bar
- Working medium: water
- Working temperature:0°C ~110°C
- Thread standard:ISO 228



5410
Manifold

Technical Desc.


- 2~12ways
- Stainless steel 304 main body
- Cartridge:EPDM Sealing
- Max.work Pressure:10bar
- Working medium: water
- Working temperature:0°C ~110°C
- Thread standard:ISO 228

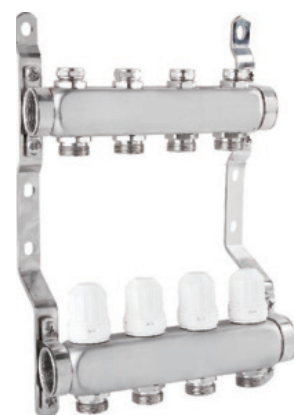

5407
Manifold

Technical Desc.

- 2~12ways
- Stainless steel 304 main body
- Cartridge:EPDM Sealing
- Max.work Pressure:10bar
- Working medium: water
- Working temperature:0°C ~110°C
- Thread standard:ISO 228

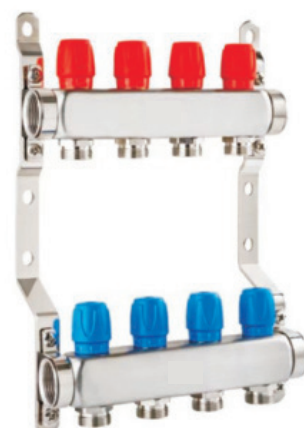

5408
Manifold

Technical Desc.

- 2~12ways
- Stainless steel 304 main body
- Cartridge:EPDM Sealing
- Max.work Pressure:10bar
- Working medium: water
- Working temperature:0°C ~110°C
- Thread standard:ISO 228



5411
Manifold

Technical Desc.

- 2~12ways
- Stainless steel 304 main body
- Cartridge:EPDM Sealing
- Max.work Pressure:10bar
- Working medium: water
- Working temperature:0°C ~110°C
- Thread standard:ISO 228




5412
Manifold

Technical Desc.

- 2~12ways
- Stainless steel 304 main body
- Cartridge:EPDM Sealing
- Max.work Pressure:10bar
- Working medium: water
- Working temperature:0°C ~110°C
- Thread standard:ISO 228

MANIFOLD SERIES



5501
Manifold

Size	3/4"-2way	1"-2way
	3/4"-3way	1"-3way
	3/4"-4way	1"-4way
	3/4"-5way	1"-5way




5502
Manifold

Size	3/4"-2way	1"-2way
	3/4"-3way	1"-3way
	3/4"-4way	1"-4way
	3/4"-5way	1"-5way



5503
Manifold

Size	3/4"-2way	1"-2way
	3/4"-3way	1"-3way
	3/4"-4way	1"-4way
	3/4"-5way	1"-5way



5504
Manifold

Size	3/4"-2way	1"-2way
	3/4"-3way	1"-3way
	3/4"-4way	1"-4way
	3/4"-5way	1"-5way
	3/4"-6way	1"-6way



5505
Manifold

Size	3/4"-2way	1"-2way
	3/4"-3way	1"-3way
	3/4"-4way	1"-4way



5506
Manifold


Size	3/4"-2way	1"-2way
	3/4"-3way	1"-3way
	3/4"-4way	1"-4way
	3/4"-5way	1"-5way

MANIFOLD SERIES



5507
Manifold

Size	3/4"-2way	1"-2way
	3/4"-3way	1"-3way
	3/4"-4way	1"-4way
	3/4"-5way	1"-5way



5508
Manifold

Size	3/4"-2way	1"-2way
	3/4"-3way	1"-3way
	3/4"-4way	1"-4way
	3/4"-5way	1"-5way



5509
Manifold

Size	3/4"-2way	3/4"-3way	3/4"-4way
	3/4"-5way	3/4"-6way	3/4"-7way
	3/4"-8way	3/4"-9way	3/4"-10way



5510
Manifold

Size	1/2"-2way	1/2"-3way	1/2"-4way
	1/2"-5way	1/2"-6way	1/2"-7way
	1/2"-8way	1/2"-9way	1/2"-10way
	1/2"-11way	1/2"-12way	



5601
By pass valve

Size	20mm		
------	------	--	--



5602
By pass valve

Size	20mm		
------	------	--	--

MANIFOLD SERIES



5603
Ball Valve

- Material:Brass
- Nominal Pressure:≤10bar
- Application Medium:Cold and hot water
- Working Temperature:≤100°C
- Connection Thread:ISO 228 standard

Size

1"



5604
Ball Valve

- Material:Brass
- Nominal Pressure:≤10bar
- Application Medium:Cold and hot water
- Working Temperature:≤100°C
- Connection Thread:ISO 228 standard

Size

1"



5609
Ball Valve

- Material:Brass
- Nominal Pressure:≤10bar
- Application Medium:Cold and hot water
- Working Temperature:≤100°C
- Connection Thread:ISO 228 standard

Size

1"



5610
Ball Valve

- Material:Brass
- Nominal Pressure:≤10bar
- Application Medium:Cold and hot water
- Working Temperature:≤100°C
- Connection Thread:ISO 228 standard

Size

1"



5605
Ball Valve

- Material:Brass
- Nominal Pressure:≤10bar
- Application Medium:Cold and hot water
- Working Temperature:≤100°C
- Connection Thread:ISO 228 standard

Size

1"



5606
Ball Valve

- Material:Brass
- Nominal Pressure:≤10bar
- Application Medium:Cold and hot water
- Working Temperature:≤100°C
- Connection Thread:ISO 228 standard

Size

1"



5611
Temperature Ball Valve

- Material:Brass
- Nominal Pressure:≤10bar
- Application Medium:Cold and hot water
- Working Temperature:≤100°C
- Connection Thread:ISO 228 standard

Size

1"



5612
Temperature Ball Valve

- Material:Brass
- Nominal Pressure:≤10bar
- Application Medium:Cold and hot water
- Working Temperature:≤100°C
- Connection Thread:ISO 228 standard

Size

1"



5607
Ball Valve

- Material:Brass
- Nominal Pressure:≤10bar
- Application Medium:Cold and hot water
- Working Temperature:≤100°C
- Connection Thread:ISO 228 standard

Size

1"



5608
Ball Valve

- Material:Brass
- Nominal Pressure:≤10bar
- Application Medium:Cold and hot water
- Working Temperature:≤100°C
- Connection Thread:ISO 228 standard

Size

1"



5613
Temperature Ball Valve

- Material:Brass
- Nominal Pressure:≤10bar
- Application Medium:Cold and hot water
- Working Temperature:≤100°C
- Connection Thread:ISO 228 standard

Size

1"

5630/5631/5632
Euro Core



Size

16mmx3/4"

20mmx3/4"

MANIFOLD SERIES

5615

End Unit

- Material: Brass
- Working Pressure: 10bar

Size

1"



5616

End Unit

- Material: Brass
- Working Pressure: 10bar

Size

1"



5617

End Unit

- Material: Brass
- Working Pressure: 10bar

Size

1"



5618

End Unit

- Material: Brass
- Working Pressure: 10bar

Size

1"



5619

Drain Valve

- Material: Brass
- Working Pressure: 10bar

Size

1"



5620

Drain Valve

- Material: Brass
- Working Pressure: 10bar

Size

1"



MANIFOLD SERIES

5621/5622

Drain Valve

- Material: Brass
- Working Pressure: 10bar

Size

1"



5624

Plug Air Vent

- Material: Brass
- Working Pressure: 10bar

Size

1"



5626

Plug Air Vent

- Material: Brass
- Working Pressure: 10bar

Size

1"



5623

Plug Air Vent

- Material: Brass
- Working Pressure: 10bar

Size

1"



5625

Plug Air Vent

- Material: Brass
- Working Pressure: 10bar

Size

1"



5627

5628

5627/5628

End Plug


Size

3/4"

1"

1 1/4"



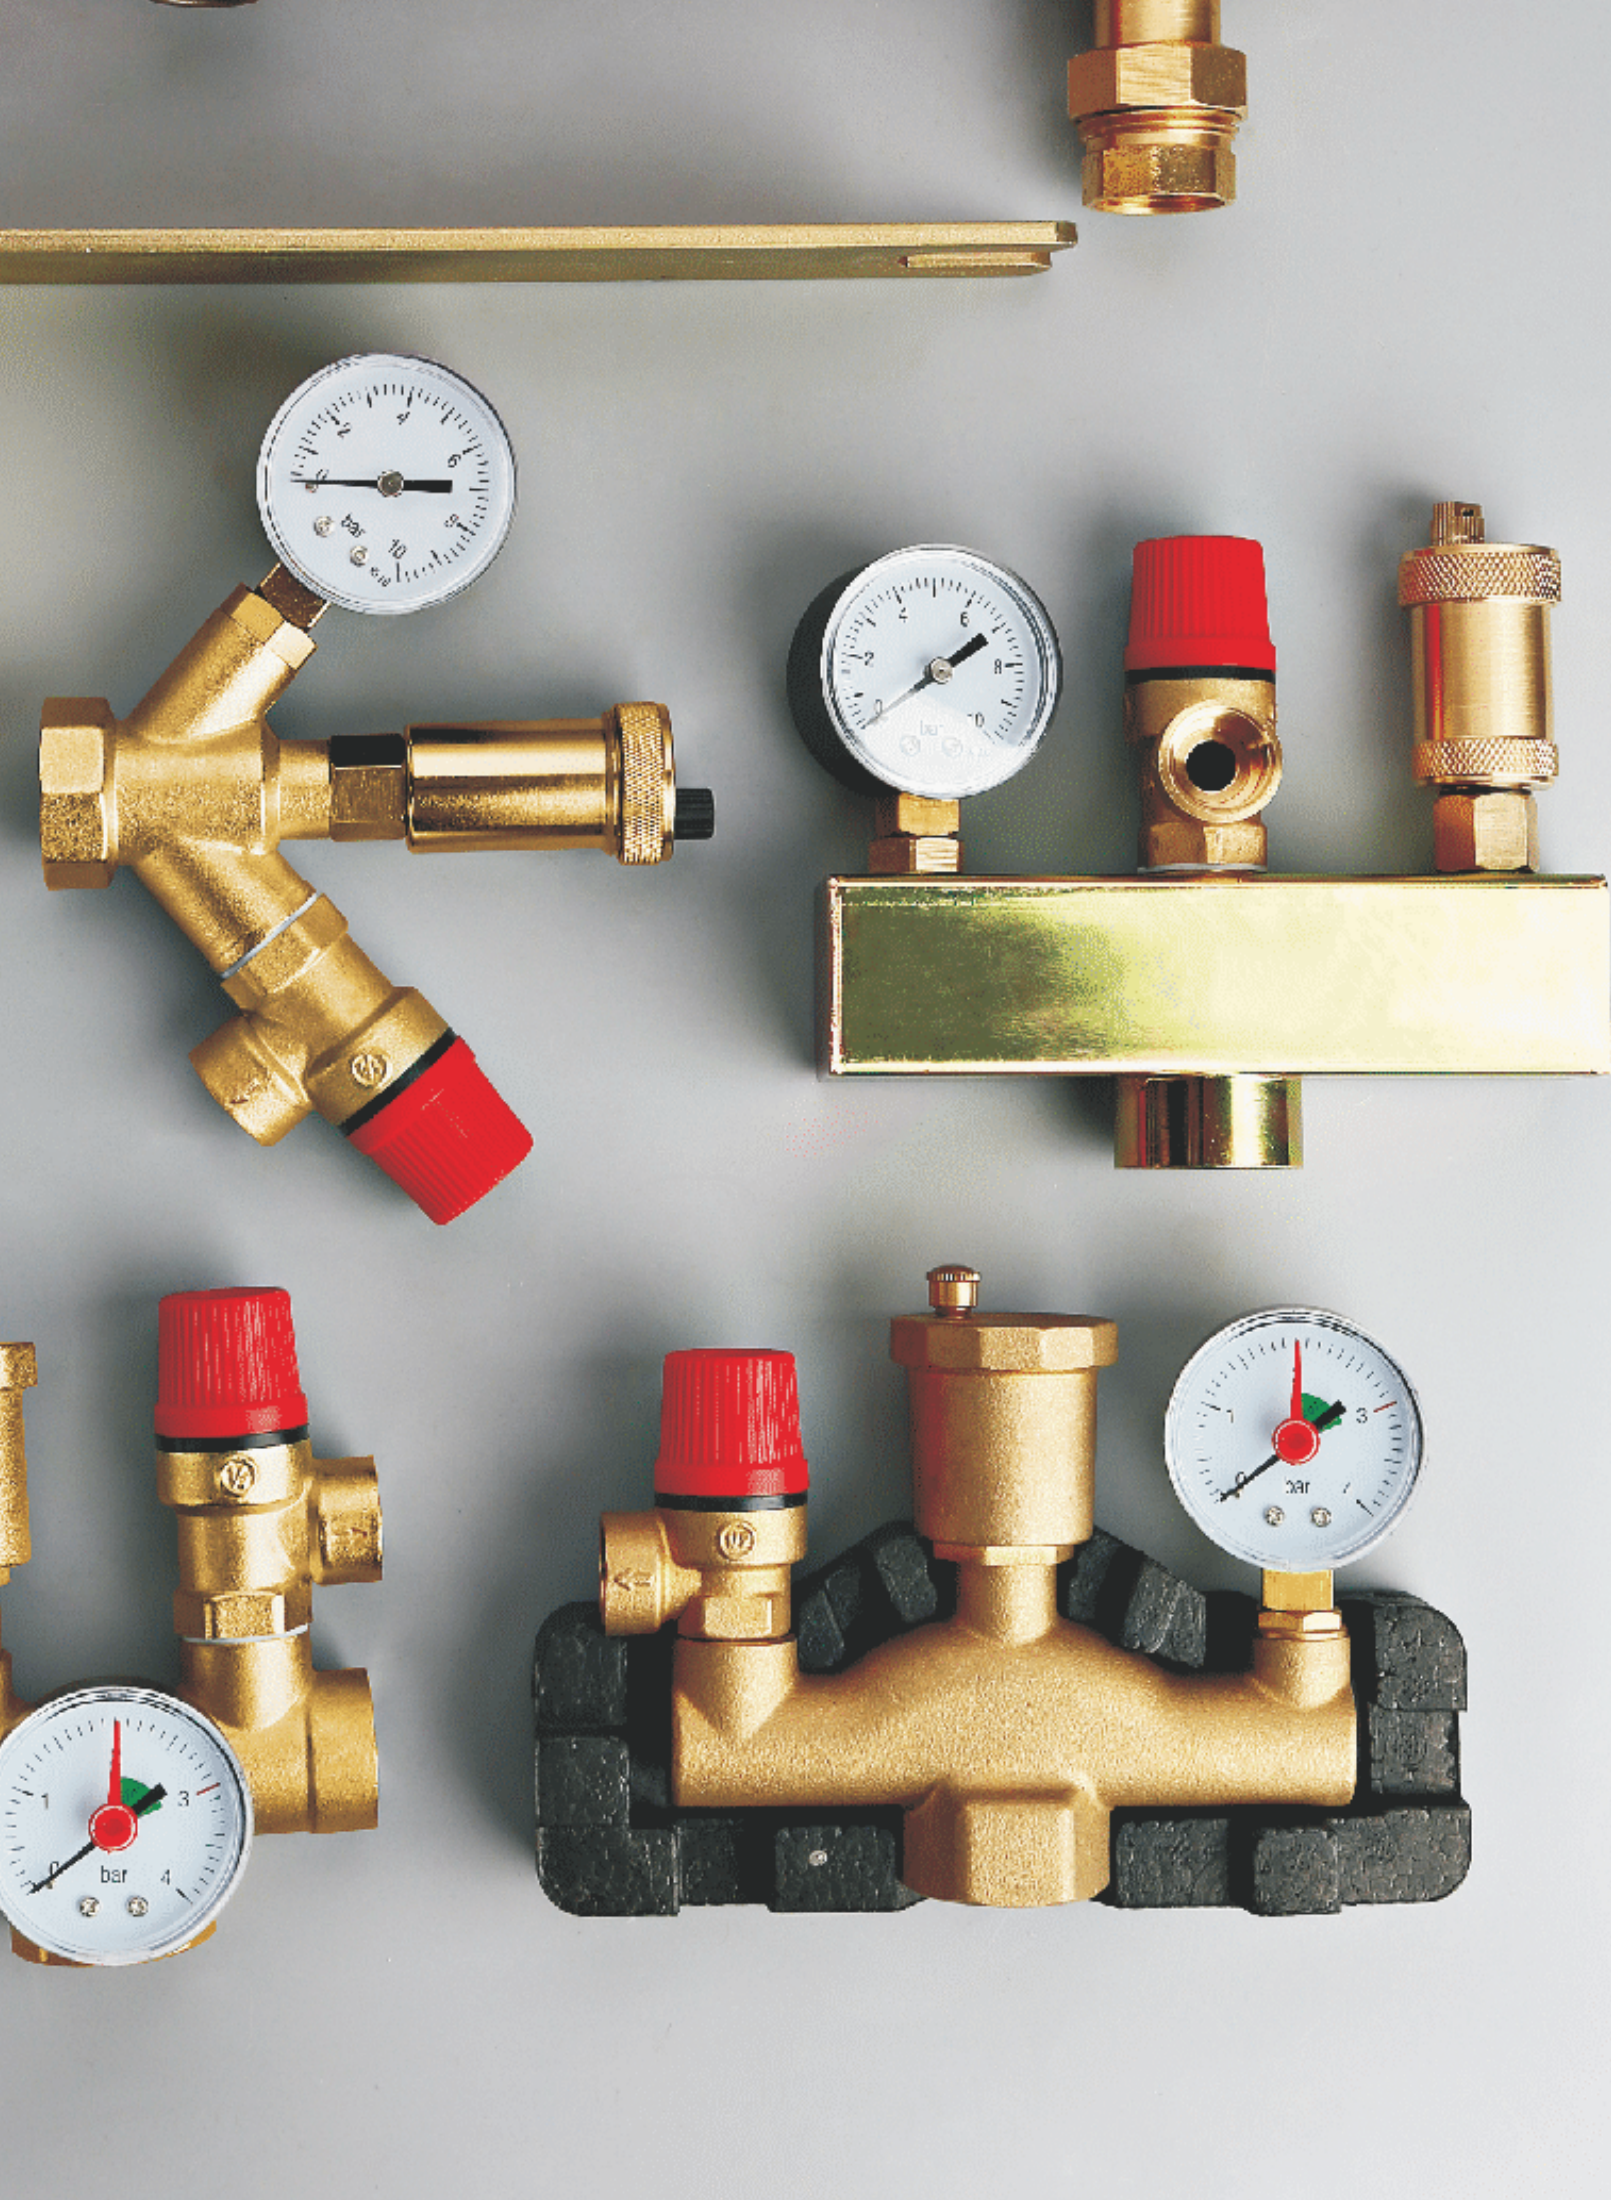

AIR SEPARATOR UNIT FOR BOILERS


5701

Safety Group For Boilers

- Setting pressure: 1.5 2 2.5 3 4 6 8 10bar
- Applicable medium: Cold and Hot water
- Max.opening pressure:+10%
- Min.closing pressure:-10%
- Working temperature:≤100°C
- Connection thread:ISO 228 standard

Size

3/4"



5702

Safety Group For Boilers

- Setting pressure: 1.5 2 2.5 3 4 6 8 10bar
- Applicable medium: Cold and Hot water
- Max.opening pressure:+10%
- Min.closing pressure:-10%
- Working temperature:≤100°C
- Connection thread:ISO 228 standard

Size

3/4"




5703

Safety Group For Boilers

- Setting pressure: 1.5 2 2.5 3 4 6 8 10bar
- Applicable medium: Cold and Hot water
- Max.opening pressure:+10%
- Min.closing pressure:-10%
- Working temperature:≤100°C
- Connection thread:ISO 228 standard

Size

1"



5704

Safety Group For Boilers

- Setting pressure: 1.5 2 2.5 3 4 6 8 10bar
- Applicable medium: Cold and Hot water
- Max.opening pressure:+10%
- Min.closing pressure:-10%
- Working temperature:≤100°C
- Connection thread:ISO 228 standard

Size

1"



5705

Safety Group For Boilers

- Setting pressure: 1.5 2 2.5 3 4 6 8 10bar
- Applicable medium: Cold and Hot water
- Max.opening pressure:+10%
- Min.closing pressure:-10%
- Working temperature:≤100°C
- Connection thread:ISO 228 standard

Size

1"




5706

Safety Group For Boilers

- Setting pressure: 1.5 2 2.5 3 4 6 8 10bar
- Applicable medium: Cold and Hot water
- Max.opening pressure:+10%
- Min.closing pressure:-10%
- Working temperature:≤100°C
- Connection thread:ISO 228 standard

Size

1"

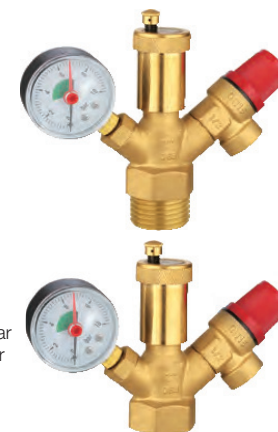

SAFTY VALVE SERIES

5707 Safe Valve



- Setting pressure: 1.5 2 2.5 3 4 6 8 10bar
- Applicable medium: Cold and Hot water
- Max.opening pressure:+10%
- Min.closing pressure:-10%
- Working temperature:≤100°C
- Connection thread:ISO 228 standard

Size 1/2" 3/4"

5708 Safe Valve



- Setting pressure: 1.5 2 2.5 3 4 6 8 10bar
- Applicable medium: Cold and Hot water
- Max.opening pressure:+10%
- Min.closing pressure:-10%
- Working temperature:≤100°C
- Connection thread:ISO 228 standard

Size 1/2" 3/4"

5709 Safe Valve



- Setting pressure: 1.5 2 2.5 3 4 6 8 10bar
- Applicable medium: Cold and Hot water
- Max.opening pressure:+10%
- Min.closing pressure:-10%
- Working temperature:≤100°C
- Connection thread:ISO 228 standard

Size 1/2" 3/4"

5710 Safe Valve



- Setting pressure: 1.5 2 2.5 3 4 6 8 10bar
- Applicable medium: Cold and Hot water
- Max.opening pressure:+10%
- Min.closing pressure:-10%
- Working temperature:≤100°C
- Connection thread:ISO 228 standard

Size 1/2" 3/4"

5711 Safe Valve



- Setting pressure: 1.5 2 2.5 3 4 6 8 10bar
- Applicable medium: Cold and Hot water
- Max.opening pressure:+10%
- Min.closing pressure:-10%
- Working temperature:≤100°C
- Connection thread:ISO 228 standard

Size 1/2" 3/4"

5712 Bypass Safty Valve



- Setting pressure: 1.5 2 2.5 3 4 6 8 10bar
- Applicable medium: Cold and Hot water
- Max.opening pressure:+10%
- Min.closing pressure:-10%
- Working temperature:≤100°C
- Connection thread:ISO 228 standard

Size 1/2" 3/4"

AIR VENT VALVE SERIES

5801 Air Vent Valve



- Material:Brass
- Nominal Pressure:≤10bar
- Application Medium:Cold and hot water
- Working Temperature:≤100°C
- Connection Thread:ISO 228 standard

Size 3/8" 1/2" 3/4"

5802 Air Vent Valve



- Material:Brass
- Nominal Pressure:≤10bar
- Application Medium:Cold and hot water
- Working Temperature:≤100°C
- Connection Thread:ISO 228 standard

Size 3/8" 1/2" 3/4"

5803 Air Vent Valve



- Material:Brass
- Nominal Pressure:≤10bar
- Application Medium:Cold and hot water
- Working Temperature:≤100°C
- Connection Thread:ISO 228 standard

Size 3/8" 1/2" 3/4"

5804 Air Vent Valve



- Material:Brass
- Nominal Pressure:≤10bar
- Application Medium:Cold and hot water
- Working Temperature:≤100°C
- Connection Thread:ISO 228 standard

Size 3/8" 1/2"

5805 Air Vent Valve



- Material:Brass
- Nominal Pressure:≤10bar
- Application Medium:Cold and hot water
- Working Temperature:≤100°C
- Connection Thread:ISO 228 standard

Size 3/8" 1/2"

5806 Air Vent Valve



- Material:Brass
- Nominal Pressure:≤10bar
- Application Medium:Cold and hot water
- Working Temperature:≤100°C
- Connection Thread:ISO 228 standard

Size 3/8" 1/2" 3/4"

AIR VENT VALVE SERIES

5807
Air Vent Valve



- Material:Brass
- Nominal Pressure:≤10bar
- Application Medium:Cold and hot water
- Working Temperature:≤100°C
- Connection Thread:ISO 228 standard

Size 3/8" 1/2" 3/4"

5808
Air Vent Valve



- Material:Brass
- Nominal Pressure:≤10bar
- Application Medium:Cold and hot water
- Working Temperature:≤100°C
- Connection Thread:ISO 228 standard

Size 3/8" 1/2"

5809
Air Vent Valve



- Material:Brass
- Nominal Pressure:≤10bar
- Application Medium:Cold and hot water
- Working Temperature:≤100°C
- Connection Thread:ISO 228 standard

Size 3/8" 1/2"

5810
Air Vent Valve



- Material:Brass
- Nominal Pressure:≤10bar
- Application Medium:Cold and hot water
- Working Temperature:≤100°C
- Connection Thread:ISO 228 standard

Size 3/8" 1/2" 3/4"

5713
Brass Safety Valve



- Setting pressure: 1.5 2 2.5 3 4 6 8 10bar
- Applicable medium: Cold and Hot water
- Max.opening pressure: +10%
- Min.closing pressure: -10%
- Working temperature:≤100°C
- Connection thread:ISO 228 standard

Size 1" 3/4"

PRESSURE REDUCE VALVE SERIES

5901
Pressure-Reduce Valve



- Material:Brass
- Working Pressure:PN16

Size 1/2" 3/4"

5902
Pressure-Reduce Valve



- Material:Brass
- Working Pressure:PN16

Size 1/2" 3/4"

5903
Pressure-Reduce Valve



- Material:Brass
- Working Pressure:PN16

Size 1/2" 3/4" 1" 1 1/4" 1 1/2" 2"

5904
Pressure-Reduce Valve



- Material:Brass
- Working Pressure:PN16

Size 1/2" 3/4" 1" 1 1/4" 1 1/2" 2"

5905
Pressure-Reduce Valve



- Material:Brass
- Working Pressure:PN16

Size 1/2" 3/4"


5906
Pressure-Reduce Valve



- Material:Brass
- Working Pressure:PN16

Size 1/2"

PRESSURE REDUCE VALVE SERIES



5907
Pressure-Reduce Valve

- Material:Brass
- Working Pressure:PN16

Size 1/2" 3/4" 1" 1 1/4" 1 1/2" 2"



5908
Pressure-Reduce Valve

- Material:Brass
- Working Pressure:PN16

Size 1/2"



5909
Pressure-Reduce Valve

- Material:Brass
- Working Pressure:PN16

Size 1/2"



5910
Pressure-Reduce Valve

- Material:Brass
- Working Pressure:PN16


Size 1/2"



122

- Material: Brass
- Working Pressure: 10bar

Size



122

- Material: Brass
- Working Pressure: 10bar

Size

MIXING VALVE/BALANCING VALVE SERIES



6001
Automatic Water Replenishment Valve

- Material: Brass
- Working Pressure: 10bar


Size 1/2" 3/4" 1" 1 1/4" 1 1/2" 2"



6002
Automatic Water Replenishment Valve

- Material: Brass
- Working Pressure: 10bar

Size 1/2" 3/4" 1" 1 1/4" 1 1/2" 2"



6003
Balancing Valve

- Material: Brass
- Working Pressure: 10bar

Size 1/2" 3/4" 1" 1 1/4" 1 1/2" 2"



6004
Balancing Valve

- Material: Brass
- Working Pressure: 10bar

Size 1/2" 3/4" 1" 1 1/4" 1 1/2" 2"



6005
Balancing Valve

- Material: Brass
- Working Pressure: 10bar

Size 1/2" 3/4" 1" 1 1/4" 1 1/2" 2"



6006
Balancing Valve

- Material: Brass
- Working Pressure: 10bar

Size 1/2" 3/4" 1" 1 1/4" 1 1/2" 2"



Working principle:

Temperature control Valves are used for the end of heating and airconditioning systems to switch flow. The temperature control valve can automatically maintain the indoor temperature of its installation area, according to the setting of the constant temperature controller. This series of temperature control valve joints hydraulic seal innovation. And the radiator can connection without using other sealing materials. loose joint on the rubber seal can guarantee fast, reliable, multiple installation. Thermostatic controller with actual temperature display panel for easy adjustment.



THERMOSTATIC RADIATOR VALVE SERIES



6101
Radiator Valve

- Working Pressure: 10bar
- Applicable medium: Cold and Hot water
- Working temperature: ≤100°C
- Connection thread: ISO 228 standard

Size

1/2"

3/4"



6102
Radiator Valve

- Working Pressure: 10bar
- Applicable medium: Cold and Hot water
- Working temperature: ≤100°C
- Connection thread: ISO 228 standard

Size

1/2"

3/4"




6103
Lock Shield Valve

- Working Pressure: 10bar
- Applicable medium: Cold and Hot water
- Working temperature: ≤100°C
- Connection thread: ISO 228 standard

Size

1/2"

3/4"



6104
Lock Shield Valve

- Working Pressure: 10bar
- Applicable medium: Cold and Hot water
- Working temperature: ≤100°C
- Connection thread: ISO 228 standard

Size

1/2"

3/4"



6104
Radiator Valve

- Working Pressure: 10bar
- Applicable medium: Cold and Hot water
- Working temperature: ≤100°C
- Connection thread: ISO 228 standard

Size

1/2"

3/4"



6106
Radiator Valve

- Working Pressure: 10bar
- Applicable medium: Cold and Hot water
- Working temperature: ≤100°C
- Connection thread: ISO 228 standard

Size

1/2"

3/4"

THERMOSTATIC RADIATOR VALVE SERIES



6107
Radiator Valve

- Working Pressure: 10bar
- Applicable medium: Cold and Hot water
- Working temperature:≤100°C
- Connection thread:ISO 228 standard

Size

1/2"

3/4"



6108
Radiator Valve

- Working Pressure: 10bar
- Applicable medium: Cold and Hot water
- Working temperature:≤100°C
- Connection thread:ISO 228 standard

Size

1/2"

3/4"



6109
Radiator Valve

- Working Pressure: 10bar
- Applicable medium: Cold and Hot water
- Working temperature:≤100°C
- Connection thread:ISO 228 standard

Size

1/2"

3/4"



6110
Radiator Valve

- Working Pressure: 10bar
- Applicable medium: Cold and Hot water
- Working temperature:≤100°C
- Connection thread:ISO 228 standard

Size

1/2"

3/4"



6111
THERMOSTATIC RADIATOR VALVE KIT

- Working Pressure: 10bar
- Applicable medium: Cold and Hot water
- Working temperature:≤100°C
- Connection thread:ISO 228 standard

Size

1/2"

3/4"



6112
THERMOSTATIC RADIATOR VALVE KIT

- Working Pressure: 10bar
- Applicable medium: Cold and Hot water
- Working temperature:≤100°C
- Connection thread:ISO 228 standard

Size

1/2"

3/4"

RADIATOR VALVE SERIES



6113
Radiator Valve

- Working Pressure: 10bar
- Applicable medium: Cold and Hot water
- Working temperature:≤100°C
- Connection thread:ISO 228 standard

Size

1/2"

3/4"



6114
Radiator Valve

- Working Pressure: 10bar
- Applicable medium: Cold and Hot water
- Working temperature:≤100°C
- Connection thread:ISO 228 standard

Size

1/2"

3/4"



6115
Radiator Valve

- Working Pressure: 10bar
- Applicable medium: Cold and Hot water
- Working temperature:≤100°C
- Connection thread:ISO 228 standard

Size

1/2"

3/4"



6116
Radiator Valve

- Working Pressure: 10bar
- Applicable medium: Cold and Hot water
- Working temperature:≤100°C
- Connection thread:ISO 228 standard

Size

1/2"

3/4"



6117
Radiator Valve

- Working Pressure: 10bar
- Applicable medium: Cold and Hot water
- Working temperature:≤100°C
- Connection thread:ISO 228 standard

Size

1/2"

3/4"



6118
Radiator Valve

- Working Pressure: 10bar
- Applicable medium: Cold and Hot water
- Working temperature:≤100°C
- Connection thread:ISO 228 standard

Size

1/2"

3/4"

RADIATOR VALVE SERIES



6119
Radiator Valve

- Working Pressure: 10bar
- Applicable medium: Cold and Hot water
- Working temperature:≤100°C
- Connection thread:ISO 228 standard

Size

1/2"

3/4"



6120
Radiator Valve

- Working Pressure: 10bar
- Applicable medium: Cold and Hot water
- Working temperature:≤100°C
- Connection thread:ISO 228 standard

Size

1/2"

3/4"



6201
Angle H Valve With Connector

- Working Pressure: 10bar
- Applicable medium: Cold and Hot water
- Working temperature:≤100°C
- Connection thread:ISO 228 standard

Size

1/2"x3/4"



6202
Angle H Valve With Connector

- Working Pressure: 10bar
- Applicable medium: Cold and Hot water
- Working temperature:≤100°C
- Connection thread:ISO 228 standard

Size

1/2"x3/4"



6203
Angle H Valve With Connector

- Working Pressure: 10bar
- Applicable medium: Cold and Hot water
- Working temperature:≤100°C
- Connection thread:ISO 228 standard

Size

1/2"x3/4"



6204
Angle H Valve With Connector

- Working Pressure: 10bar
- Applicable medium: Cold and Hot water
- Working temperature:≤100°C
- Connection thread:ISO 228 standard

Size

1/2"x3/4"

RADIATOR VALVE SERIES



6121
Radiator Valve

- Working Pressure: 10bar
- Applicable medium: Cold and Hot water
- Working temperature:≤100°C
- Connection thread:ISO 228 standard

Size

1/2"

3/4"



6122
Radiator Valve

- Working Pressure: 10bar
- Applicable medium: Cold and Hot water
- Working temperature:≤100°C
- Connection thread:ISO 228 standard

Size

1/2"

3/4"



6123
Radiator Valve

- Working Pressure: 10bar
- Applicable medium: Cold and Hot water
- Working temperature:≤100°C
- Connection thread:ISO 228 standard

Size

1/2"

3/4"



6124
Radiator Valve

- Working Pressure: 10bar
- Applicable medium: Cold and Hot water
- Working temperature:≤100°C
- Connection thread:ISO 228 standard

Size

1/2"

3/4"

RADIATOR ACCESSORY SERIES



6301
Thermostatic Head

- Max Temperature:≤80°C
- Working Pressure: 10bar
- Thermostatic Control total route>3.5mm

Size M30x1.5mm



6302
Thermostatic Head

- Max Temperature:≤80°C
- Working Pressure: 10bar
- Thermostatic Control total route>3.5mm

Size M30x1.5mm



6303
Thermostatic Head

- Max Temperature:≤80°C
- Working Pressure: 10bar
- Thermostatic Control total route>3.5mm

Size M30x1.5mm



6304
Thermostatic Head

- Max Temperature:≤80°C
- Working Pressure: 10bar
- Thermostatic Control total route>3.5mm

Size M30x1.5mm



6305
Thermostatic Head

- Max Temperature:≤80°C
- Working Pressure: 10bar
- Thermostatic Control total route>3.5mm

Size M30x1.5mm



6306
Thermostatic Head

- Max Temperature:≤80°C
- Working Pressure: 10bar
- Thermostatic Control total route>3.5mm

Size M30x1.5mm

RADIATOR ACCESSORY SERIES



6307
Thermostatic Head

- Max Temperature:≤80°C
- Working Pressure: 10bar
- Thermostatic Control total route>3.5mm

Size M30x1.5mm



6308
Thermostatic Head

- Max Temperature:≤80°C
- Working Pressure: 10bar
- Thermostatic Control total route>3.5mm

Size M30x1.5mm



6309
Thermostatic Head

- Max Temperature:≤80°C
- Working Pressure: 10bar
- Thermostatic Control total route>3.5mm

Size M30x1.5mm



6310
Thermostatic Head

- Max Temperature:≤80°C
- Working Pressure: 10bar
- Thermostatic Control total route>3.5mm

Size M30x1.5mm



6311
Radiator Set

Size 1"



6312
Radiator Set

Size 1"

BALL VAVLE SERIES

7001
Ball Valve

- Material: Brass
- Working Pressure: PN16
- Thread according to ISO228

Size 1/2" 3/4" 1" 1 1/4" 1 1/2" 2"



7002
Ball Valve

- Material: Brass
- Working Pressure: PN16
- Thread according to ISO228

Size 1/2" 3/4" 1" 1 1/4" 1 1/2" 2"



7003
Ball Valve

- Material: Brass
- Working Pressure: PN16
- Thread according to ISO228

Size 1/2" 3/4" 1"



3109
Ball Valve

- Material: Brass
- Working Pressure: PN16
- Thread according to ISO228

Size 1/2" 3/4" 1"



7004
Ball Valve

- Material: Brass
- Working Pressure: PN16
- Thread according to ISO228

Size 1/2" 3/4" 1"



3209
Ball Valve

- Material: Brass
- Working Pressure: PN16
- Thread according to ISO228


Size 1/2"Mx1216 1/2"Mx1620 3/4"Mx1620

BALL VAVLE SERIES

7101
Ball Valve

- Material: Brass
- Working Pressure: PN30
- Thread according to ISO228


Size 1/2" 3/4" 1" 1 1/4" 1 1/2" 2"

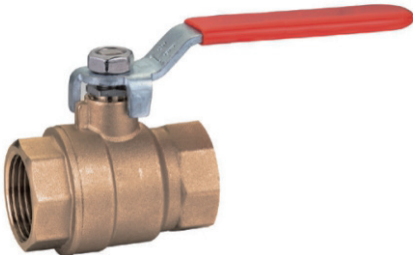

7102
Ball Valve

- Material: Brass
- Working Pressure: PN30
- Thread according to ISO228

Size 1/2" 3/4" 1"

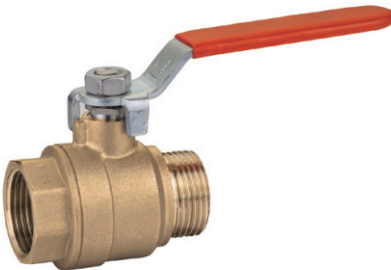

7103
Ball Valve

- Material: Brass
- Working Pressure: PN30
- Thread according to ISO228


Size 1/2" 3/4" 1" 1 1/4" 1 1/2" 2"



7104
Ball Valve

- Material: Brass
- Working Pressure: PN30
- Thread according to ISO228

Size 1/2" 3/4" 1"

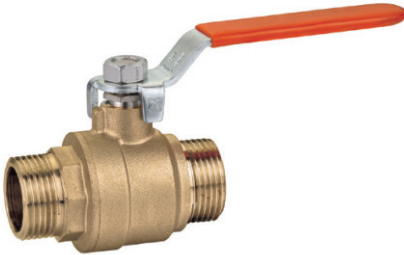

7105
Ball Valve

- Material: Brass
- Working Pressure: PN30
- Thread according to ISO228

Size 1/2" 3/4" 1" 1 1/4" 1 1/2" 2"



7106
Ball Valve

- Material: Brass
- Working Pressure: PN30
- Thread according to ISO228

Size 1/2" 3/4" 1"

BALL VAVLE SERIES



7201
Ball Valve

- Material: Brass
- Working Pressure: PN25
- Thread according to ISO228

Size 1/2" 3/4" 1" 1 1/4" 1 1/2" 2"



7202
Ball Valve

- Material: Brass
- Working Pressure: PN25
- Thread according to ISO228

Size 1/2" 3/4" 1" 1 1/4" 1 1/2" 2"



7203
Ball Valve

- Material: Brass
- Working Pressure: PN25
- Thread according to ISO228

Size 1/2" 3/4" 1"



7204
Ball Valve

- Material: Brass
- Working Pressure: PN25
- Thread according to ISO228

Size 1/2" 3/4" 1"



7207
Ball Valve

- Material: Brass
- Working Pressure: PN25
- Thread according to ISO228

Size 1/2" 3/4" 1"



7208
Ball Valve

- Material: Brass
- Working Pressure: PN25
- Thread according to ISO228

Size 1/2" 3/4" 1"



7209
Ball Valve

- Material: Brass
- Working Pressure: PN25
- Thread according to ISO228

Size 1/2" 3/4" 1" 1 1/4" 1 1/2" 2"



7210
Ball Valve

- Material: Brass
- Working Pressure: PN25
- Thread according to ISO228

Size 1/2" 3/4" 1"



7205
Ball Valve

- Material: Brass
- Working Pressure: PN25
- Thread according to ISO228

Size 1/2" 3/4" 1"



7206
Ball Valve

- Material: Brass
- Working Pressure: PN25
- Thread according to ISO228

Size 1/2" 3/4" 1"

BALL VAVLE SERIES

BALL VAVLE SERIES



7401
Ball Valve

- Material: Brass
- Working Pressure: PN40
- Thread according to ISO228

Size 1/2" 3/4" 1" 1 1/4" 1 1/2" 2"



7402
Ball Valve

- Material: Brass
- Working Pressure: PN40
- Thread according to ISO228

Size 1/2" 3/4" 1"



7403
Ball Valve

- Material: Brass
- Working Pressure: PN40
- Thread according to ISO228

Size 1/2" 3/4" 1"



7404
Ball Valve

- Material: Brass
- Working Pressure: PN40
- Thread according to ISO228

Size 1/2" 3/4" 1"



7407
Ball Valve

- Material: Brass
- Working Pressure: PN40
- Thread according to ISO228

Size 1/2" 3/4" 1"



7408
Ball Valve

- Material: Brass
- Working Pressure: PN40
- Thread according to ISO228

Size 1/2" 3/4" 1"



7409
Ball Valve

- Material: Brass
- Working Pressure: PN40
- Thread according to ISO228

Size 1/2" 3/4" 1"



74010
Ball Valve

- Material: Brass
- Working Pressure: PN40
- Thread according to ISO228

Size 1/2" 3/4" 1"



7405
Ball Valve

- Material: Brass
- Working Pressure: PN40
- Thread according to ISO228

Size 1/2" 3/4" 1"



7406
Ball Valve

- Material: Brass
- Working Pressure: PN40
- Thread according to ISO228

Size 1/2" 3/4" 1"



7411
Ball Valve

- Material: Brass
- Working Pressure: PN40
- Thread according to ISO228

Size 1/2" 3/4" 1"



7501
Ball Valve

- Material: Brass
- Working Pressure: PN40
- Thread according to ISO228

Size 1/2" 3/4" 1"



GAS VALVE SERIES



7601
Gas Ball Valve

- Material: Brass
- Working Pressure: Max 40bar

Size

1/4" ~ 4"



7602
Gas Ball Valve

- Material: Brass
- Working Pressure: Max 40bar

Size

1/2"

3/4"



7603
Gas Ball Valve

- Material: Brass
- Working Pressure: Max 40bar

Size

1/4" ~ 2"



7604
Gas Ball Valve

- Material: Brass
- Working Pressure: Max 40bar

Size

1/2"

3/4"



7605
Gas Ball Valve

- Material: Brass
- Working Pressure: Max 40bar

Size

1/2"



7606
Gas Ball Valve

- Material: Brass
- Working Pressure: Max 40bar

Size

1/2"

GAS VALVE SERIES



7607
Gas Ball Valve

- Material: Brass
- Working Pressure: Max 40bar

Size

1/2"



7608
Gas Ball Valve

- Material: Brass
- Working Pressure: Max 40bar

Size

1/2"



7609
Gas Ball Valve

- Material: Brass
- Working Pressure: Max 40bar

Size

1/2"



7610
Gas Ball Valve

- Material: Brass
- Working Pressure: Max 40bar

Size

1/2"



7611
Gas Ball Valve

- Material: Brass
- Working Pressure: Max 40bar

Size

1/4"

1/2"



7612
Gas Ball Valve

- Material: Brass
- Working Pressure: Max 40bar

Size

1/2"

GAS VALVE SERIES



7613
Gas Valve-Aluminum Handle

- Material: Brass
- Working Pressure: Max 40bar

Size

1/2"

3/4"



7614
Gas Valve-Aluminum Handle

- Material: Brass
- Working Pressure: Max 40bar

Size

1"




7615
Drain Valve

- Material: Brass
- Working Pressure: Max 40bar

Size

1/2"

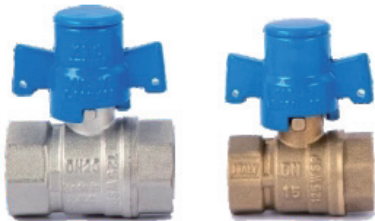

7616
Lockable Valve

- Material: Brass
- Working Pressure: Max 40bar

Size

1/2"



7617
Magnetic Lock Valve

- Material: Brass
- Working Pressure: Max 40bar

Size

1/2" ~1"



7618
Magnetic Lock Valve

- Material: Brass
- Working Pressure: Max 40bar

Size

1/2"

MINI BALL VALVE SERIES



7701
Mini Ball Valve

- Material: Brass
- Working Pressure: $\leq 1.6\text{MPa}$

Size 1/4" 3/8" 1/2" 3/4"



7702
Mini Ball Valve

- Material: Brass
- Working Pressure: $\leq 1.6\text{MPa}$

Size 1/4" 3/8" 1/2" 3/4"



7703
Mini Ball Valve

- Material: Brass
- Working Pressure: $\leq 1.6\text{MPa}$

Size 1/2"x16"



7704
Mini Ball Valve

- Material: Brass
- Working Pressure: $\leq 1.6\text{MPa}$

Size 1/4" 3/8" 1/2" 3/4"



7705
Mini Ball Valve

- Material: Brass
- Working Pressure: $\leq 1.6\text{MPa}$

Size 1/4" 3/8" 1/2" 3/4"



7706
Mini Ball Valve

- Material: Brass
- Working Pressure: $\leq 1.6\text{MPa}$

Size 1/4" 3/8" 1/2" 3/4"

GATE VALVE/STOP VALVE SERIES



8001
Gate Valve

- Material: Brass
- Working Temperature: $-20\leq T\leq 120^{\circ}\text{C}$

Size 15mm 22mm 28mm 35mm 42mm 54mm



8002
Gate Valve

- Material: Brass
- Working Temperature: $-20\leq T\leq 120^{\circ}\text{C}$

Size 1/2" 3/4" 1" 1 1/4" 1 1/2" 2" 3" 4"



8003
Gate Valve

- Material: Brass
- Working Temperature: $-20\leq T\leq 120^{\circ}\text{C}$

Size 1/2" 3/4" 1" 1 1/4" 1 1/2" 2" 3" 4"



8004
Gate Valve

- Material: Brass
- Working Temperature: $-20\leq T\leq 120^{\circ}\text{C}$

Size 1/2" 3/4" 1" 1 1/4" 1 1/2" 2" 3" 4"



8005
Gate Valve

- Material: Brass
- Working Temperature: $-20\leq T\leq 120^{\circ}\text{C}$

Size 1/2" 3/4" 1"



8006
Stop Valve

- Material: Brass
- Working Temperature: $-20\leq T\leq 120^{\circ}\text{C}$

Size 1/2" 3/4" 1" 1 1/4" 1 1/2" 2"

STOP VALVE SERIES



8007
Stop Valve

- Material: Brass
- Working Temperature: -20≤T≤120℃

Size 1/2" 3/4" 1" 1 1/4" 1 1/2" 2"



8008
Stop Valve

- Material: Brass
- Working Temperature: -20≤T≤120℃

Size 1/2" 3/4" 1" 1 1/4" 1 1/2" 2"

CHECK VALVE SERIES



8101
Pump Valve

- Material: Brass
- Working Pressure: ≤1.6MPa

Size 1 1/4"x1 1/2" 28mmx1 1/4"



8102
Check Valve

- Material: Brass
- Working Pressure: ≤1.6MPa

Size 1/2" 3/4" 1" 1 1/4" 1 1/2" 2" 3" 4"



8009
Built In Valve

- Material: Brass
- Working Temperature: -20≤T≤150℃

Size 1/2" 3/4" 1"



8010
Built In Valve

- Material: Brass
- Working Temperature: -20≤T≤150℃

Size 1/2" 3/4"



8103
Check Valve

- Material: Brass
- Working Pressure: ≤1.6MPa

Size 1/2" 3/4" 1" 1 1/4" 1 1/2" 2" 3" 4"



8104
Check Valve

- Material: Brass
- Working Pressure: ≤1.6MPa

Size 1/2" 3/4" 1" 1 1/4" 1 1/2" 2"



8011
Valve For Watermeter

- Material: Brass

Size 1/2"



8012
Lockable Valve

- Material: Brass

Size 1/2"



8105
Check Valve

- Material: Brass
- Working Pressure: ≤1.6MPa

Size 1/2" 3/4" 1" 1 1/4" 1 1/2" 2"



8106
Foot Valve S.S. Filter

- Material: Brass
- Working Pressure: ≤1.6MPa

Size 1/2" 3/4" 1" 1 1/4" 1 1/2" 2"

CHECK VALVE SERIES



8107
Check Valve

- Material: Brass
- Working Pressure: ≤1.6MPa

Size 1/2" 3/4" 1" 1 1/4" 1 1/2" 2"



8108
Swing Check Valve

- Material: Brass
- Working Pressure: ≤1.6MPa

Size 1/2" 3/4" 1" 1 1/4" 1 1/2" 2"



8109
Y Strainer

- Material: Brass
- Working Pressure: ≤1.6MPa

Size 1"



8110
Y Strainer

- Material: Brass
- Working Pressure: ≤1.6MPa

Size 1"



8111
Y Strainer

- Material: Brass
- Working Temperature: -20≤T≤120°C

Size 1/2" 3/4" 1"



8112
Y Strainer

- Material: Brass
- Working Temperature: -20≤T≤120°C

Size 1/2" 3/4" 1"

BIBCOCK SERIES



9001
Bibcock

- Material: Brass
- Working Pressure: ≤1.6MPa
- Thread according to ISO228

Size 1/2"x3/4" 3/4"x1" 1"x1 1/4"



9002
Bibcock

- Material: Brass
- Working Pressure: ≤1.6MPa
- Thread according to ISO228

Size 1/2"x3/4" 3/4"x1" 1"x1 1/4"



9003
Bibcock

- Material: Brass
- Working Pressure: ≤1.6MPa
- Thread according to ISO228

Size 1/2"x3/4" 3/4"x1" 1"x1 1/4"



9004
Bibcock

- Material: Brass
- Working Pressure: ≤1.6MPa
- Thread according to ISO228

Size 1/2"x3/4" 3/4"x1" 1"x1 1/4"



9005
Bibcock

- Material: Brass
- Working Pressure: ≤1.6MPa
- Thread according to ISO228

Size 1/2"x3/4" 3/4"x1" 1"x1 1/4"



9006
Bibcock

- Material: Brass
- Working Pressure: ≤1.6MPa
- Thread according to ISO228

Size 1/2"x3/4" 3/4"x1" 1"x1 1/4"

ANGLE VALVE SERIES



9007
Bibcock

- Material: Brass
- Working Pressure: ≤1.6MPa
- Thread according to ISO228

Size 1/2"x3/4" 3/4"x1" 1"x1 1/4"



9008
Bibcock

- Material: Brass
- Working Pressure: ≤1.6MPa
- Thread according to ISO228

Size 1/2"x3/4" 3/4"x1" 1"x1 1/4"



9101
Angle Valve

- Material: Brass
- Working Pressure: 10bar

Size 1/2"x1/2"



9102
Angle Valve

- Material: Brass
- Working Pressure: 10bar

Size 1/2"x1/2" 1/2"x3/4"



9105
Angle Valve

- Material: Brass
- Working Pressure: 10bar

Size 1/2"x3/8" 1/2"x1/2" 1/2"x3/4"



9106
Angle Valve

- Material: Brass
- Working Pressure: 10bar

Size 1/2"x3/8" 1/2"x1/2" 1/2"x3/4"



9108
Angle Valve

- Material: Brass
- Working Pressure: 10bar

Size 1/2"x1/2" 1/2"x3/4"



9103
Angle Valve

- Material: Brass
- Working Pressure: 10bar

Size 1/2"x3/8" 1/2"x1/2" 1/2"x3/4"



9104
Angle Valve

- Material: Brass
- Working Pressure: 10bar

Size 1/2"x3/8" 1/2"x1/2" 1/2"x3/4"



9109
Shut Valve

- Material: Brass
- Working Pressure: 10bar

Size 1/2"Mx3/4"Mx1/2"



9110
Washing Valve

- Material: Brass
- Working Pressure: 10bar

Size 1/2"Mx3/4"Mx1/2"

BRASS FITTING SERIES



9801
SLEEVE

Size	16mm	20mm	25mm	32mm
------	------	------	------	------



9802
COUPLING

Size	16mmx1/2"	16mmx3/4"	20mmx1/2"	20mmx3/4"	25mmx1/2"	25mmx1"	25mmx3/4"	32mmx1"	32mmx3/4"
------	-----------	-----------	-----------	-----------	-----------	---------	-----------	---------	-----------



9803
REDUCEING COUPLING

Size	16mmx1/2"	16mmx3/4"	20mmx1/2"	20mmx3/4"	25mmx1/2"	25mmx1"	25mmx3/4"	32mmx1"	32mmx3/4"
------	-----------	-----------	-----------	-----------	-----------	---------	-----------	---------	-----------



9804
MALE COUPLING

Size	16mmx1/2"	16mmx3/4"	20mmx1/2"	20mmx3/4"	25mmx1/2"	25mmx1"	25mmx3/4"	32mmx1"	32mmx3/4"
------	-----------	-----------	-----------	-----------	-----------	---------	-----------	---------	-----------



9805
MALE ELBOW 90°

Size	16mmx1/2"	16mmx3/4"	20mmx1/2"	20mmx3/4"	25mmx1/2"	25mmx1"	25mmx3/4"	32mmx1"	32mmx3/4"
------	-----------	-----------	-----------	-----------	-----------	---------	-----------	---------	-----------



9806
FEMALE ELBOW 90°

Size	16mmx1/2"	16mmx3/4"	20mmx1/2"	20mmx3/4"	25mmx1/2"	25mmx1"	25mmx3/4"	32mmx1"	32mmx3/4"
------	-----------	-----------	-----------	-----------	-----------	---------	-----------	---------	-----------

BRASS FITTING SERIES



9807
MALE ELBOW 90°WITH UION NUT

Size	16mmx1/2"	16mmx3/4"	20mmx1/2"	20mmx3/4"	25mmx1/2"	25mmx1"	25mmx3/4"	32mmx1"	32mmx3/4"
------	-----------	-----------	-----------	-----------	-----------	---------	-----------	---------	-----------



9808
REDUCING ELBOW 90°

Size	16mmx20mm	16mmx25mm	20mmx25mm	25mmx32mm
------	-----------	-----------	-----------	-----------



9809
ELBOW 90°

Size	16mm	20mm	25mm	32mm
------	------	------	------	------



9810
REDUCEING COUPLING

Size	16mmx20mm	16mmx25mm	20mmx25mm	25mmx32mm
------	-----------	-----------	-----------	-----------



9811
COUPLING

Size	16mm	20mm	25mm	32mm
------	------	------	------	------



9812
FEMALE REDUCING TEE

Size	16mmx1/2"x16mm	20mmx1/2"x20mm
------	----------------	----------------

BRASS FITTING SERIES



9813
REDUCING TEE

Size	20x16x20(mm)	20x16x20(mm)	20x25x20(mm)	20x16x16(mm)
	20x25x16(mm)	25x16x16(mm)	25x16x25(mm)	25x20x16(mm)
	25x20x20(mm)	25x20x25(mm)	25x25x16(mm)	25x25x20(mm)
	25x32x25(mm)	25x20x32(mm)	25x25x32(mm)	25x16x20(mm)
	32x16x32(mm)	32x20x32(mm)	32x25x32(mm)	



9814
TEE

Size	16mm	20mm	25mm	32mm
------	------	------	------	------



9815
ELBOW 90°WITH ALL MOUNT

Size	16mmx1/2"	
------	-----------	--



9816
Fitting

Size	1/2"x10mm	1/2"x12mm	1/2"x14mm
	1/2"x18mm	1/2"x20mm	1/2"x20mm
	1"x25mm		



9819
Fitting

Size	1/2"	3/4"	1"
------	------	------	----



9820
Fitting

Size	3/4"Fx 3/4"F	3/4"Mx 3/4"F	1"Mx3/4"F
	1"Mx1"F	1 1/4"Mx1"F	



9821
Fitting

Size	3/8"-10mm	3/8"-15mm	3/8"-20mm	3/8"-25mm
	1/2"-10mm	1/2"-20mm	1/2"-25mm	1/2"-30mm
	1/2"-40mm	1/2"-50mm	3/4"-10mm	3/4"-15mm
	3/4"-20mm	3/4"-25mm	3/4"-30mm	3/4"-40mm
	1"-20mm	1"-30mm	1"-40mm	



9822
Fitting

Size	1/2"Fx 3/4"F-75mm	1/2"Fx 3/4"F-95mm
	1/2"Fx 3/4"F-115mm	



9817
Fitting

Size	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
------	------	------	----	--------	--------	----



9818
Fitting

Size	3/4"MX1/2"F	1/2"X3/8"	1"X3/4"F
------	-------------	-----------	----------



9823
Fitting

Size	1"x80mm	1"x90mm
------	---------	---------



9824
Fitting

Size	1/2"x 1/2"x 1/2"x 1/2"	3/4"x 3/4"x 3/4"x 3/4"
	1"x 1"x 1"x 1"	

BRASS FITTING SERIES



9825
Fitting

Size	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
------	------	------	------	------	----	--------	--------	----



9826
Fitting

Size	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
------	------	------	------	------	----	--------	--------	----



9827
Fitting

Size	3/8"x1/4"	3/8"x1/2"	1/2"x3/4"	3/4"x1"
	1"x1 1/4"	1 1/4"x1 1/2"	1 1/2"x1"	



9828
Fitting

Size	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
------	------	------	------	------	----	--------	--------	----



9829
Fitting

Size	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
------	------	------	------	------	----	--------	--------	----



9830
Fitting

Size	1/4"x1/8"	3/8"x1/4"	3/8"x1/4"	1/4"x1/2"
	1/3"x3/8"	3/4"x3/8"	3/4"x1/2"	1"x1/2"
	1"x3/4"	1 1/4"x3/4"	1 1/4"x1"	1 1/2"x1"
	1 1/4"x1 1/2"	2"x1 1/4"	2"x1 1/2"	

BRASS FITTING SERIES



9831
Fitting

Size	3/8"Fx 1/4"M	1/2"Fx 3/8"M	3/4"Fx 1/2"M
	1"Fx3/4"M	1 1/4"Fx1"M	



9832
Fitting

Size	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
------	------	------	------	----	--------	--------	----



9833
Fitting

Size	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
------	------	------	------	------	----	--------	--------	----



9834
Fitting

Size	1/2"	3/4"	1"
------	------	------	----



9835
Fitting

Size	1/2"	3/4"	1"
------	------	------	----



9836
Fitting

Size	1/2"x 3/8"	3/4"x 1/2"
	1"x 3/4"	

BRASS FITTING SERIES



9837
Fitting

Size	1/8"	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
------	------	------	------	------	------	----	--------	--------	----



9838
Fitting

Size	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	
------	------	------	------	----	--------	--------	----	--



9839
Fitting

Size	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
------	------	------	------	------	----	--------	--------	----



9840
Fitting

Size	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"		
------	------	------	------	------	----	--------	--	--



9841
Fitting

Size	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"		
------	------	------	------	------	----	--------	--	--



9842
Fitting

Size	1/2"x 50mm	1/2"x 100mm
	1/2"x 120mm	

BRASS FITTING SERIES



9843
Fitting

Size	1/2"Mx20mm	3/4"Mx25mm
	1"Mx32mm	1 1/4Mx40mm
	1 1/2Mx50mm	2Mx63mm



9844
Fitting

Size	1/2"Fx20mm	3/4"Fx25mm
	1"Fx32mm	1 1/4Fx40mm
	1 1/2Fx50mm	2Fx63mm



9845
Fitting

Size	1/2"		
------	------	--	--



9846
Fitting

Size	1/2"x1/2"x10mm	1/2"x1/2"x15mm
	1/2"x1/2"x20mm	1/2"x1/2"x25mm
	1/2"x1/2"x30mm	1/2"x1/2"x40mm
	1/2"x1/2"x50mm	1/2"x1/2"x100mm



9847
Fitting

Size	1/2"x50mm	3/4"x50mm	1"x50mm	1/2"x60mm
	3/4"x60mm	1"x60mm	1/2"x80mm	3/4"x80mm
	1"x80mm	1/2"x100mm	3/4"x100mm	1"x100mm
	1/2"x150mm	3/4"x150mm	1"x150mm	1/2"x200mm
	3/4"x200mm	1"x200mm	1/2"x250mm	